

# PURE SMART™ Wi-Fi REMOTE ROOM CONTROLLER

CONNECTED BY WIZ PRO FOR TABLE TOP OR WALL



REV 04.05.24



## DESCRIPTION:

The Pure Smart™ Wi-Fi Remote Room Controller works with any WiZ Connected Smart fixtures/lamps. The Remote Room Controller is powered by four AAA batteries and grants independent adjustment of color temperature and intensity, as well as scene selection for four favorite scenes which are selected and assigned to the room controller in the WIZ App. The four favorited scenes, as with any scene in the WiZ ecosystem, can consist of any combination of products including bulbs, luminaires, or smart controls and can support any combination of color ranges including static white or dimmable white, Tunable White, and Tricolor RGBTW allowing for intricate customization and control. No Hub required. Room Controller communicates with fixtures directly on the Local Area Network allowing for control even if the Wi-Fi goes down. Compatible with WiZ Connected fixtures only. For custom quotes and layout assistance, send your drawings and ideas to our design team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

## OPERATION

Dimming, CCT control rocker, and a scene control toggle. No load maximum. Communicates with 2.4GHz Wi-Fi only. No Hub Required.

## EASY INSTALLATION

The Pure Smart™ Wi-Fi Remote Room Controller is powered by 4 AAA batteries and is therefore completely wireless. Multiple mounting methods available including to a standard switch box, on the wall with the included drywall anchors or adhesive strip, or kept on a tabletop with the rubber pads that help to keep it stationary. Single Pole or 3-way compatible with Pure Smart Dimmer (SWW-DIM-WH), Pure Smart Switch (SWW-SWT-WH), 120V Room Controller (CWW-TW-SCENE-WH) and another Remote Room Controller. No wires. No hub. Total control.

## WIZ APP

The Room Controller is added as an accessory in the WIZ app (Available on iOS or Android) and communicates directly to the WiZ enabled light fixture via direct wi-fi signal on Local Area Network (LAN). Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, scheduling, and custom scenes can all be programmed with the WIZ app or WIZ Pro Dashboard.

## BODY



Durable polycarbonate body.

## SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

## SPECIFICATIONS

Approved Location	Dry / Indoor
Input Voltage	4 AAA batteries
Certification	cULus, FCC
Compatible Load(s)	WiZ Connected products only
Maximum Power	No Load Maximum
Output Current	5A
Power Consumption	Relay OFF: 0.07W Soft OFF: 0.79W ON: 0.79W
Dimming	Dims to 3%
Operating Temperature	23°F~113°F (-5°C~45°C)
Wireless Frequency	2.4GHz
Wireless Standard	IEEE 802.11
Warranty	3 Year

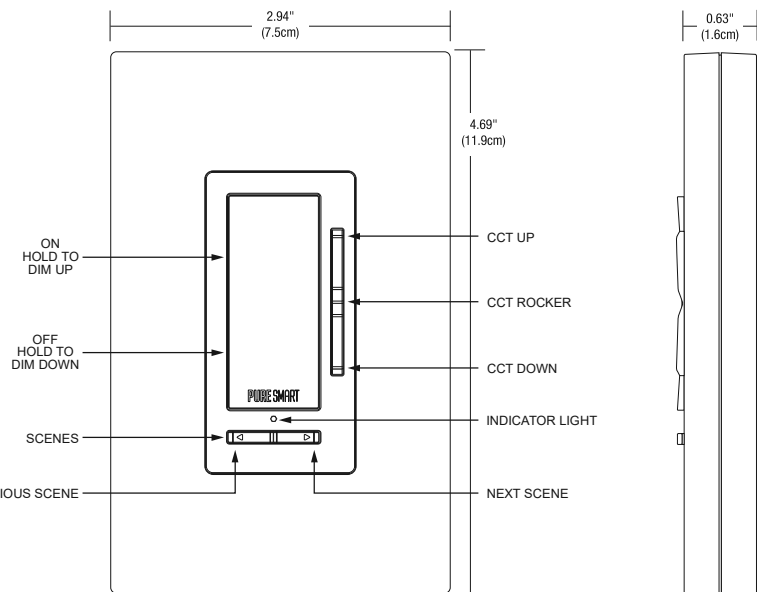


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

# PURE SMART™ Wi-Fi REMOTE ROOM CONTROLLER

CONNECTED BY WIZ PRO FOR TABLE TOP OR WALL

## NETWORK TOPOLOGY

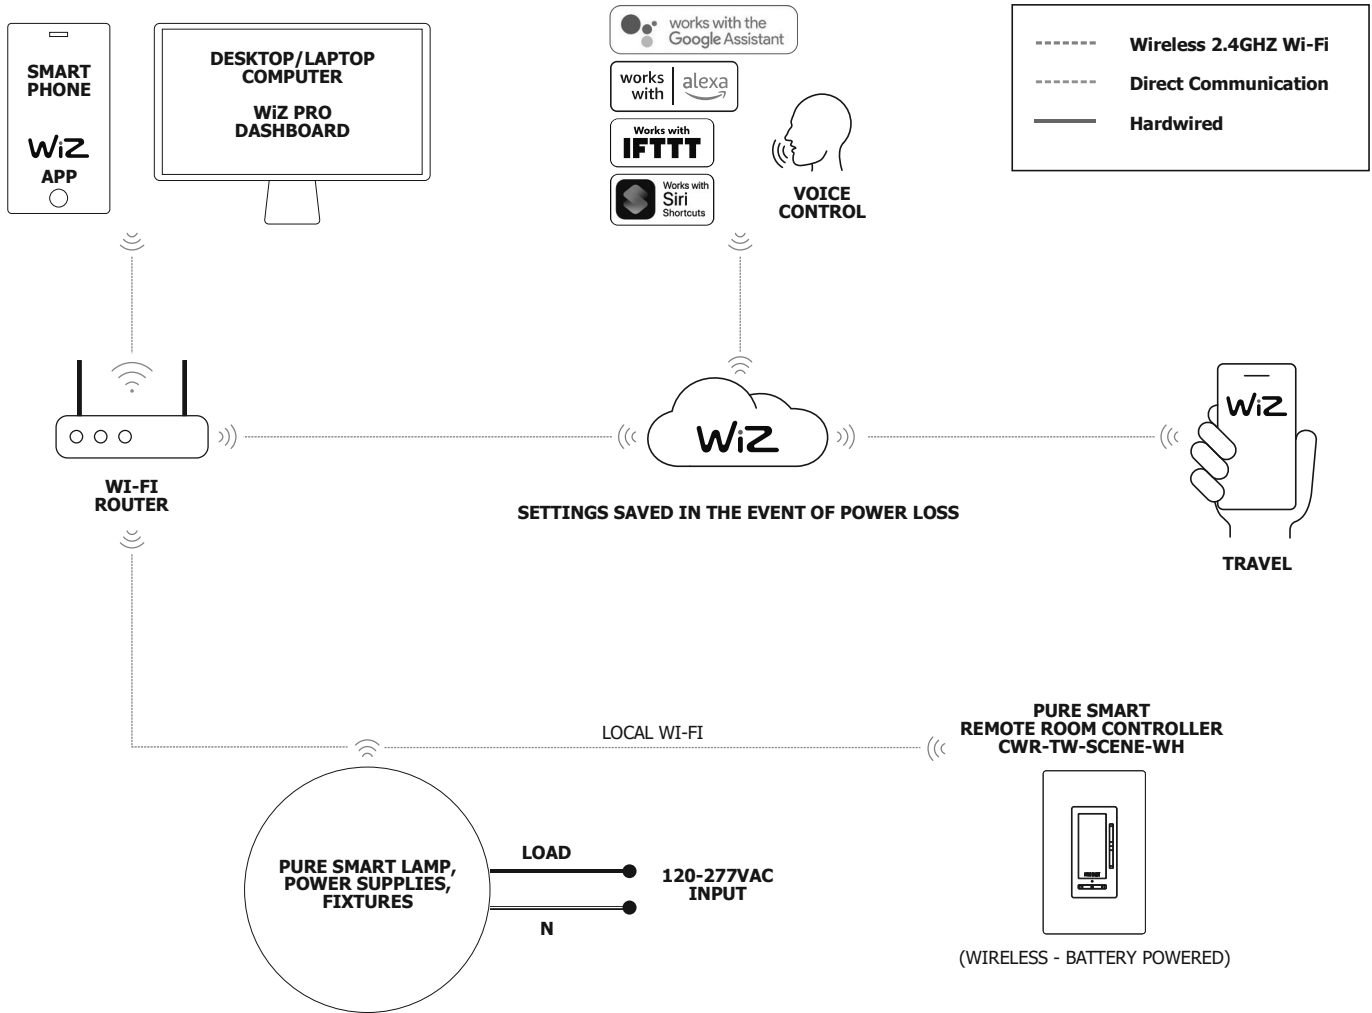

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--