




# Ra Line Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

## Your box should contain

1x assembled luminaire



2x cotton gloves




## Tools needed, not included

- Junction box and screw
- Flat head screwdriver
- Wire connectors




Unpack all components from the box and dispose of the packaging. Please recycle.

1 One person need to hold the fixture by the cable while the other does the installation.

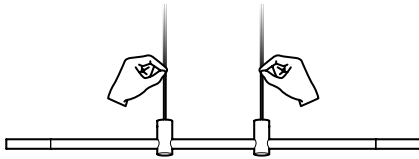


2 Install the canopy on the ceiling using appropriate anchors and screws in the 4 corners. Pass all wires thru canopy.




3 First, connect the two ground cables (green cables) together.


Then, connect the live and neutral wires. If the installation requires it, connect the Dali dimming wires.

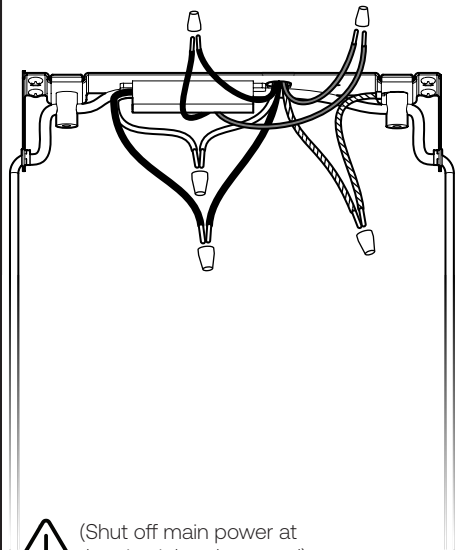

4 Unscrew the strain reliefs to adjust the lamp.

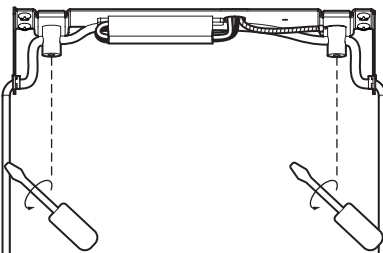


5 Adjust the lamp using a level.

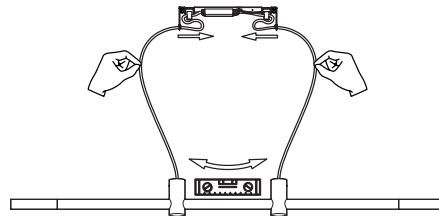

(Shut off main power at the circuit breaker panel)

Ceiling wires	Fixture wires		For 0-10V dimming 220V only	
Live	Black	Brown	Purple +	DC+
Neutral	White	Blue	Grey -	DC-
Ground	Green screw			

6 Tighten the strain reliefs to secure the lamp.

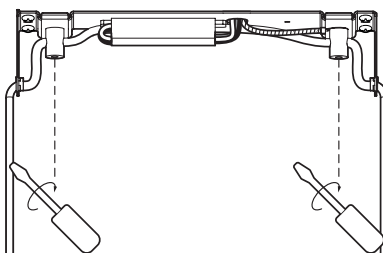

7 By holding the wires, slide the cover of the canopy on the fixed part of the canopy.

