

**Side View** 

## **Description:**

Accepts input voltage of 120VAC and outputs 24VDC power up to 3x96 watts. Can be used as a dimmable or non-dim Power Supply. Power Supply features short circuit and overload protection. Power Supply features short circuit and overload protection. Indoor applications only.

### Applications: Indoor\*

'To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

#### **Power Input:**

120 volts AC, 50/60Hz

### **Power Output:**

Class 2; 24 volts DC 3 x 4A, 3x96 watts maximum

#### **Dimensions:**


14" x 10" x 3"

# **Compatible Dimmers:**

Legrand: Adorne ADTP703TU


Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and

Radio RA 2



96W, 24VDC LOW VOLTAGE WIRE SIZE CHART: 3% VOLTAGE DROP

WIRE LENGTH (FT)	UP TO 33FT	34FT-52FT	53FT-86FT	87FT-130FT
WIRE SIZE	14 AWG	12 AWG	10 AWG	8 AWG
VOLTAGE AT END OF WIRE	23.28VDC	23.29VDC	23.28VDC	23.28VDC

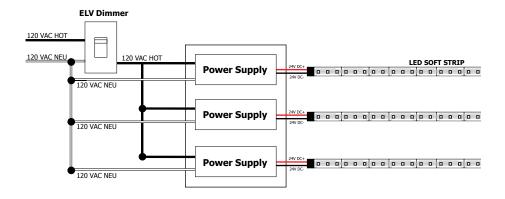



PROJECT:

FIXTURE