



Gusto

THE MODERN FAN COMPANY
Customer Service
M-F 8am - 4pm (PST)


(ph) 888.588.3267
www.modernfan.com

Gusto Fan- Installation instructions


Should you have any questions or difficulty installing your new fan, please contact Modern Fan Co. customer service immediately.

Note: Power supply must be turned off prior to any contact with electrical wires. It is recommended that a licensed electrician be hired to install your ceiling fan.

(1) Remove and identify contents of carton.

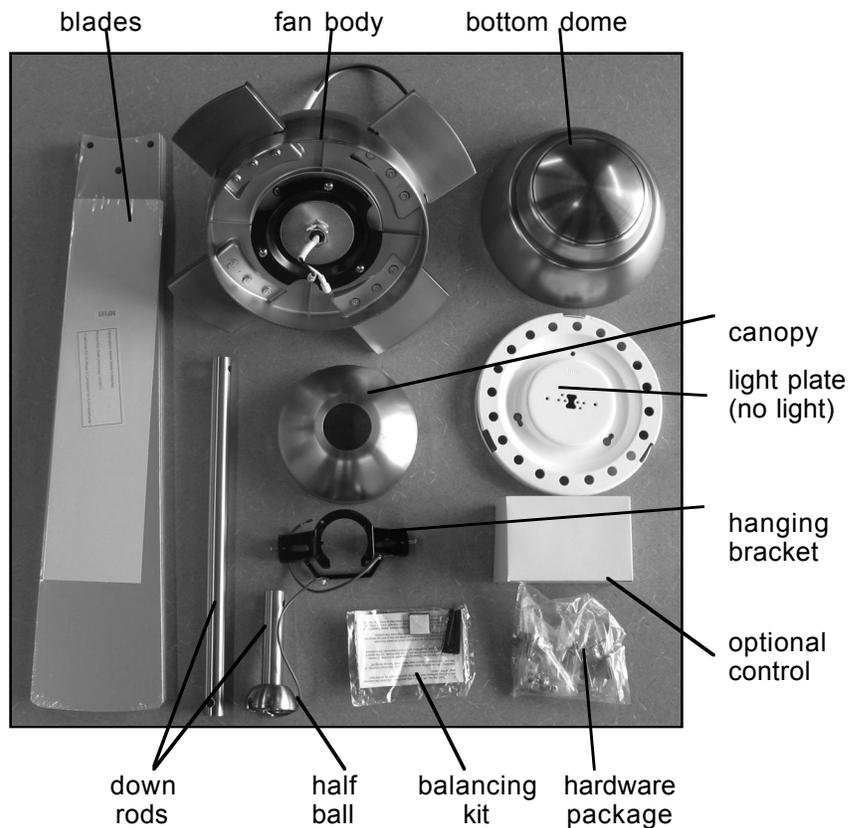


(2) If your fan was ordered with a light kit, you should also find the following parts:

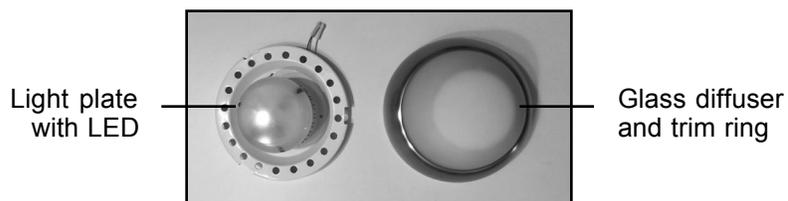


(3) Place fan body on packaging material, bottom side up. Remove one of the three screws on the black flange and set aside for reinstallation in step (4). Loosen, but don't remove, the remaining two screws.

flange


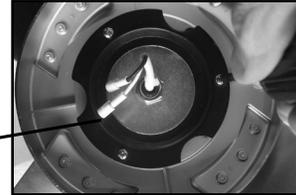


(4) If your fan does not have a light, position light lead wires against large washer and place lighting plate on flange so that wires key holes fit over two screws on flange. Be sure wires are clear of edges and completely contained in the center cavity. Rotate plate and reinstall third screws from step (3). Tighten all three screws. If your fan does have a light, make quick connect wire leads and prior to attachment of light plate.



← Without LED

→ With LED



(5) Carefully turn fan body over, and replace on packaging material. Using blade screws and washers from hardware package, secure each of four blades to rotor arms.



(6) Remove stopper pin and half ball from small down rod by loosening set screw on half ball. Set parts aside for reinstallation in step (10).

stopper pin


set screw



(7) Remove the stopper screw and loosen the set screw on the fan collar. Set the stopper screw aside for step (8).

stopper screw

set screw

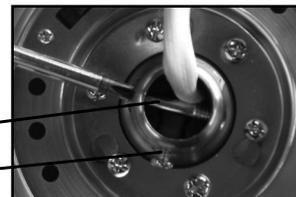


(8) Run fan wires through selected down rod. Reinstall stopper screw from step (7) and firmly tighten set screw on fan collar against down rod.

Note: If ceiling height allows, using a longer down rod will increase airflow and efficiency.



(9) Slide fan canopy over down rod and carefully rest on top of fan body.

canopy

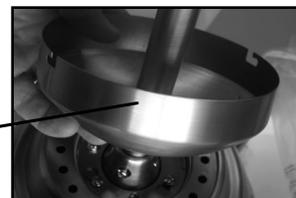

(10) Reinstall half ball from step (6) on end of down rod. Be sure that stopper pin is inserted through down rod and seated in half ball. Tighten set screw against down rod.

set screw
stopper pin



(11) Using machine screws from hardware package or existing screws in junction box, securely attach hanging bracket to ceiling junction box.



(12) Lift fan to ceiling and set half ball in the hanging bracket so that the ridge on the edge of the hanging bracket is seated in the slotted channel in the half ball.

channel and ridge





(13) With fan safely suspended by bracket, make wire connections with wire nuts included in hardware package as described in the **Control Installation Instructions**. If using optional #003, #004 or #005 controls, the receiving unit should be placed inside the arms of the hanging bracket and connected at this time.

(14) Remove set screws on the sides of the hanging bracket. Lift canopy to ceiling. Align slots on side of canopy with set screw holes on hanging bracket, reinstall and tighten set screws to hold canopy in place.

set screw



(15) If installing a light kit, proceed to step (15). Otherwise, install bottom dome by aligning tabs with slots in white light plate and rotating clockwise until firmly attached.

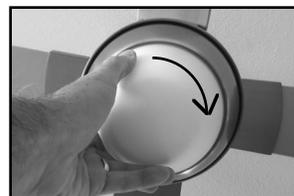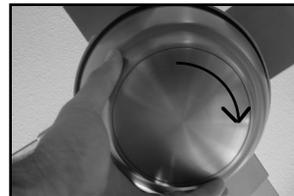

(16) Install wall control as described in the control installation instructions (unless using a handheld remote control only).

(17) Your fan is reversible for summer and winter operation. The reverse switch is located on the top of the fan body. When reading the REVERSE label, the LEFT position is for summer and the RIGHT position is for winter.

reverse switch



(18) The rotor and motor of your fan have been dynamically balanced at the factory. In addition, the blades have been matched to the nearest gram to ensure a well balanced ceiling fan. Furthermore, a blade balancing kit has been included with your fan. Please refer to the instructions packaged with the balancing kit should your fan require additional balancing.



709 Washington Street • Ashland, OR 97520 • (tel) 888.588.3267 • (e) info@modernfan.com

www.modernfan.com