

Justice Design Group

Installation Instructions

I-Light LED Pendant

For Model series: NSH-7012-MBLK

IMPORTANT


- Justice Design recommends that a licensed electrician install this lighting fixture
- Installation must comply with all building, safety, and electrical codes and requirements
- Disconnect power to the junction box prior to installation
- Do not reconnect power until this fixture is properly installed
- This fixture is designed to mount to a standard metal 4-0 octagonal junction box



Hardware Pack contains:


A. 2-Junction Box Screws

B. 3-Wire Nuts




1

Remove screws securing fixture to Mounting Plate.

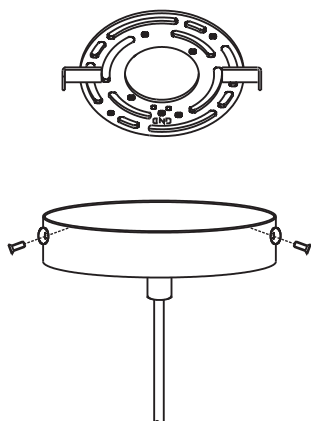

2

Secure the Mounting Plate to junction box with the junction box Screws.

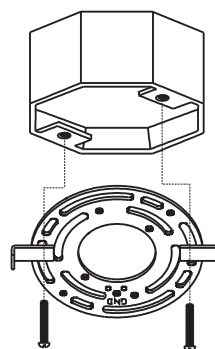

405 E Euclid Ave • Compton, CA 90222

Tel (213) 437-0102 • Fax: (213) 437-0860 • E-mail: sales@JDG.COM Website: www.JDG.com


INS-7012

©11/26/25


I-Light LED Pendant

3

Adjust to the desired height of lamp body Cable, then use Strain relief to prevent pulling at the outlet of lamp body.

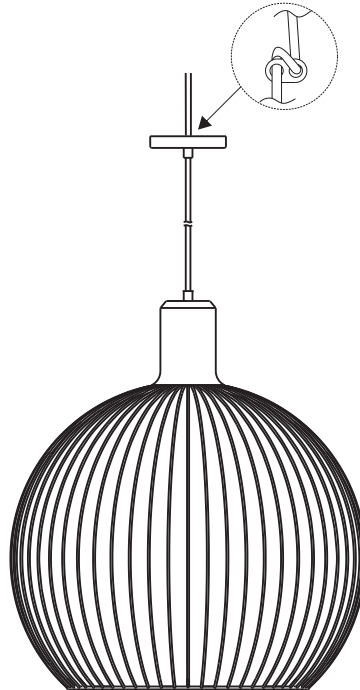**4**

Connect fixture wires to supply wires using Wire Nuts. Observe polarity: black to power, white to neutral, and bare copper to green ground. Tuck wires and wire nuts into junction box.

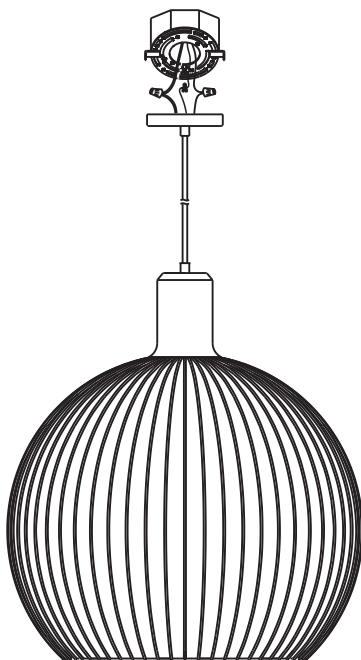**5**

Attach canopy to Mounting Plate using Screws.

