# **Burk Head**



#### DESCRIPTION


The simple design of the Burk spot-head light from Tech Lighting is inspired by telephoto camera lenses and utilizes a powerful LED source harnessed by field-changeable optics for precision beam control. Multiple CRI and CCT options make this head highly effective in both residential and commercial applications. Includes field replaceable 12 watt, 740 delivered lumen, 27000K, 3000K or 3500K field replaceable LED module. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer). Choice of 20° or 35° field changeable optics. Integrated lens holder accommodates up to two MR16 sized lenses or louvers (sold separately). As a general rule when using the Burk head, we do not recommend using greater than 33% of the maximum wattage specified for the low voltage transformer due to inrush current requirements. For assistance in calculations, please contact Technical Support.

#### INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

## **ACCESSORIES & OPTICAL CONTROLS**

Eggcrate Louver

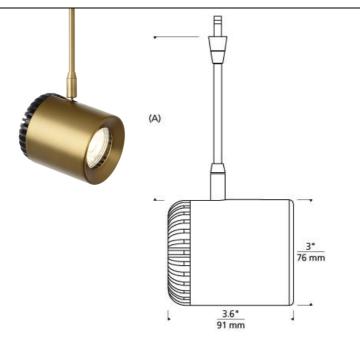

















antique bronze / antique bronze

black satin nickel

brown chestnut / antique bronze

satin nickel / satin nickel

weathered gray oak / satin nickel

white / satin nickel

white ash / satin nickel

aged brass / aged brass

### ORDERING INFORMATION

700	SYSTEM <b>BRK</b>	CRI	COLOR TEMP	BEAM SPREAD	LENGTH (A)	FINISH	LAMP
	FJ FREEJACK MP MONOPOINT MO MONORAIL MO2 TWO-CIRCUIT MONORAIL	8 80 CRI 9 90 CRI	27 2700K 30 3000K 35 3500K	20 20° 35 35°	03 3" 06 6" 12 12"	R AGED BRASS Z ANTIQUE BRONZE B BLACK NZBROWN CHESTNUT/ANTIQUE BRONZE NSBROWN CHESTNUT/SATIN NICKEL S SATIN NICKEL YZ WEATHERED GRAY OAK/ANTIQUE BRONZE YS WEATHERED GRAY OAK/SATN NICKEL W WHITE AZ WHITE ASH/ANTIQUE BRONZE AS WHITE ASH/SATIN NICKEL	LED

Note: MP includes 4 Round Flush Canopy

When installing LED option on MO2 only magnetic transformers may be used.



7400 Linder Avenue Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500

Tech Lighting, L.L.C.

700 B	RK
FIXTURE TYPE:	
JOB NAME:	
NOTES:	
	<del></del>

