

GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product can be dimmed with most ELV or TRIAC dimmers.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.




7400 Linder Ave, Skokie, IL 60077 847.410.4400


www.techlighting.com

© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company

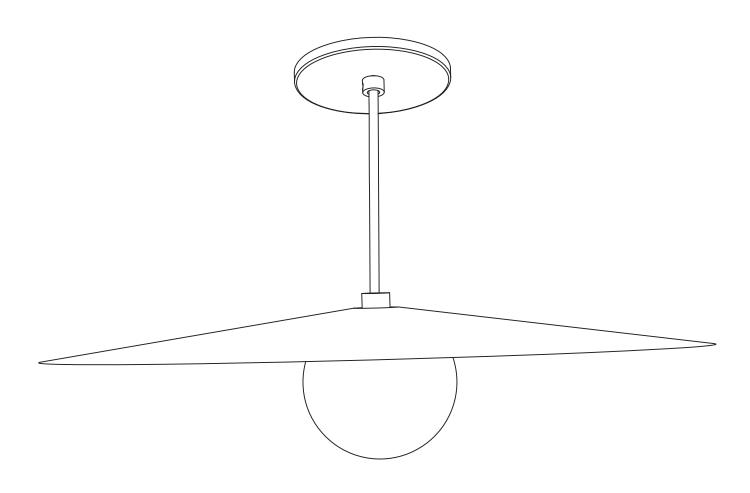

Install the Fixture

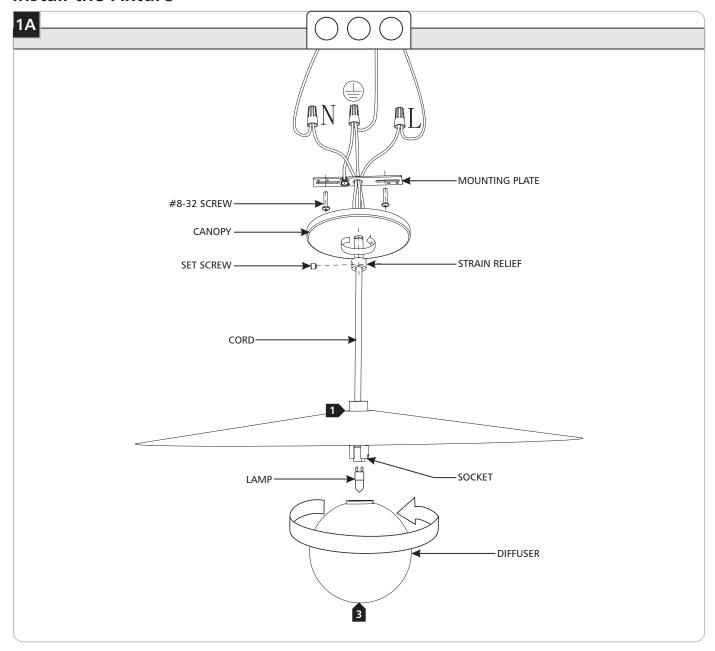

CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

- 1 Feed the cord through the shade and lower the shade until it rests properly on the socket.
- 2 Install the lamp by inserting into the socket. Refer to the label on the socket for Max Wattage information.
- Install the diffuser by placing it over the socket and screwing it onto the fixture. Make sure that the diffuser is properly installed before releasing. Do not over tighten.
- 4 Follow the instructions included with the canopy to complete installation.