



lightology.com  
866-954-4489  
07-27-25

Project: _____	
Company: _____	
Location: _____	Fixture Type: _____
SPEC #: <b>JUN111318</b>	
Approved On: _____	Approved By: _____

## TL602E 60W Plug-In LED Electronic Remote Driver/Transformer


By Juno Lighting

### Description


TL602E-60 12 Volt 60 Watt Plug-In Electronic Remote Driver/Transformer is rated for 0.5 to 60 watts incandescent or LED total load, 120VAC input. Supplied with 6 foot factory installed cord and plug. Available in a 10, 25 or 60 watt direct wire or 60 watt plug in option. Made of 18 gauge die formed steel with powder coat finish in White. IC rated for recessed applications and can be buried in insulation. Transformer should be located within 4 feet of first fixture in run. Provision for ground wire attachment. Supplied with two No 6 wood screws for mounting to wood surfaces. Incandescent loads can be dimmed with high quality dimmers designed for use with electronic transformers. LED loads may be dimmed using only dimmers that have been tested and qualified by Juno for use with Juno LED fixtures including: Leviton Acenti Ace-06-1L, Lutron Diva DVELV-300P, Lutron Nova T NTELV300, Lutron Skylark SELV-300P, or Lutron Spacer SPSELV-600, sold separately. 5.5 inch length x 1.5 inch width x 1.1 inch height. Compatible with Juno Trac 12 miniature low voltage track system using LED or incandescent luminaires or Mini LED downlights.

### Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	60W
DIMMER	Low Voltage Electronic
DIMENSIONS	5.5"L x 1.5"W x 1.1"H
BULB	N/A

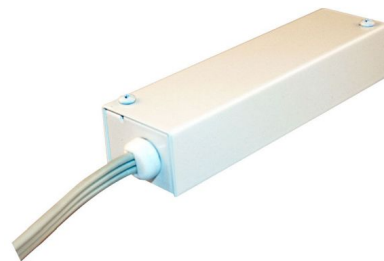

Shown in white



CLICK TO VIEW PRODUCT

Notes: