

# Lightology

lightology.com  
866-954-4489  
05-25-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **BRI1157597**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## PAR36 G35 Base 7W 12V 60Deg 3000K 85CRI 10-PACK

By Brilliance



### Description

The Brilliance 7 Watt 12 Volt PAR36 screw terminal base bulb is designed to fit in standard low voltage PAR36 fixtures. These LEDs are thermally engineered to operate in enclosed fixtures and provide added security by automatically cooling down and reducing lumen output when exposed to extreme heat. Dimmable with Brilliance Dimmer and most magnetic transformers. Note: Sold as a 10 pack.

### Specifications


COLOR . . . . . Brown  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 7W  
DIMMER . . . . . Low Voltage Magnetic  
DIMENSIONS . . . . . 4.37"W x 2.29"H  
BULB . . . . . PAR36/SCRTEM/7W/12V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 60°  
COLOR RENDERING . . . . . 85 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 100.00  
LUMINOUS FLUX . . . . . 700 lumens



Shown in brown

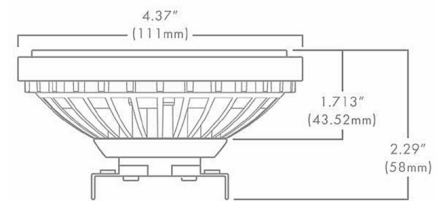

CLICK TO VIEW PRODUCT

Notes: