

# Lightology

lightology.com  
866-954-4489  
05-22-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **BRI1157598**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## PAR36 G53 Base 11W 12V 30Deg 2700K 85CRI 10-PACK

By Brilliance



### Description

The Brilliance 11 Watt 12 Volt PAR36 screw terminal base bulb is designed to fit in standard low voltage PAR36 fixtures. These LEDs are thermally engineered to operate in enclosed fixtures and provide added security by automatically cooling down and reducing lumen output when exposed to extreme heat. Dimmable with Brilliance Dimmer and most magnetic transformers. Amber available in 30 degree beam angle only. Note: Sold as a 10 pack.

### Specifications


COLOR . . . . . Brown  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 11W  
DIMMER . . . . . Low Voltage Magnetic  
DIMENSIONS . . . . . 4.37"W x 2.29"H  
BULB . . . . . PAR36/SCRTEM/11W/12V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 30°  
COLOR RENDERING . . . . . 85 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 81.82  
LUMINOUS FLUX . . . . . 900 lumens



Shown in brown

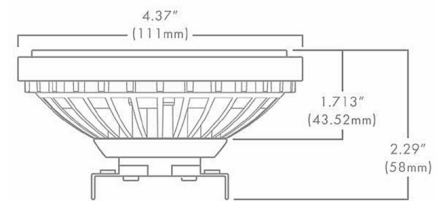

CLICK TO VIEW PRODUCT

Notes: