

# Lightology

lightology.com  
866-954-4489  
08-04-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1237055**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Pure Smart Wi-Fi Wall Dimmer Single/3-Way WIZ Pro

By PureEdge Lighting



### Description


The Pure Smart Wi-Fi Dimmer works with non-smart static white or Warm Dim bulbs and fixtures compatible with forward phase or TRIAC dimming (not compatible with 0-10V dimming). Features an on/off switch and dimming functionality. The Pure Smart Wi-Fi Dimmer allows for control from anywhere via the WiZ app on your mobile device or the WiZ Pro Dashboard through your home Wi-Fi. No hub required. The Pure Smart Wi-Fi Dimmer installs just like a regular in-wall wall switch and is compatible with standard gangable boxes. Requires neutral wire. Can be used in single pole and multi-location applications. Maximum load: 400W Incandescent, 150W CFL/LED Retrofit. 2.4GHz Wi-Fi only. The Pure Smart Wi-Fi Dimmer can be controlled via the WiZ app (works with IOS and Android) from anywhere. Scheduling, grouping, and voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, and scheduling can all be programmed with the WiZ app or WiZ Pro Dashboard. Note: Decorator style wall plate sold separately.

### Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	N/A
DIMMER	N/A
DIMENSIONS	1.88"W x 4.15"H x 0.25"D
BULB	N/A



Shown in white

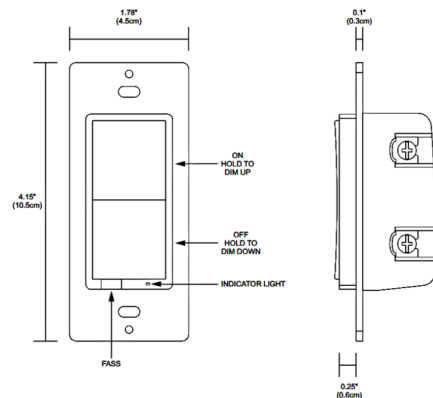

CLICK TO VIEW PRODUCT

Notes: