



BRAND

PureEdge Lighting

DESCRIPTION



300 Watt 12 Volt 2-Circuit (2X150W) Outdoor Remote Magnetic Transformer converts line voltage 120V input to low voltage 12 volt output. Minimum load: 50 watts. The remote transformer must be installed in an accessible remote location. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. Dimmable using a magnetic low voltage dimmer, sold separately.



Shown in: Black

SHADE COLOR	N/A
BODY FINISH	Black
WATTAGE	300W
DIMMER	Low Voltage Magnetic
DIMENSIONS	4.1"W x 8"H x 3.1"D
LAMP	N/A

SPEC # EDG568526

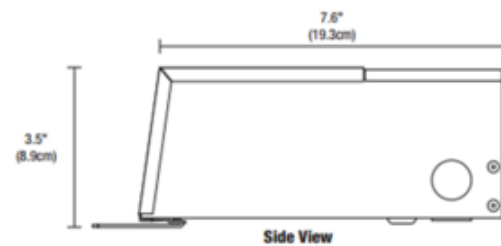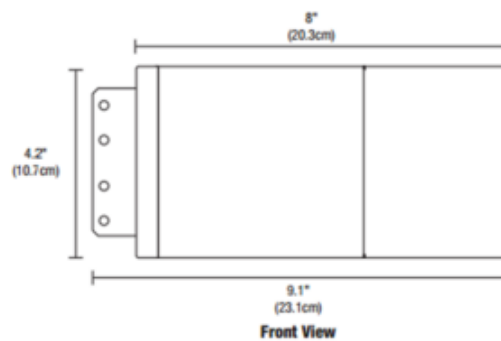

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE