

# Lightology

lightology.com  
866-954-4489  
07-02-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **AST972437**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Fuse 3 Recessed Wall Sconce with USB-A Port By Astro Lighting




### Description

The Fuse Recessed Wall Sconce with USB-A Port has an adjustable arm to direct light exactly where you want. A concealed micro switch turns the light off when it is pushed back to its central resting place against the wall when used with a wall dimmer. Includes a recessed junction box. No on/off switch. No driver required. Note: Does not mount to a standard US junction box. Fixture recesses into wall and includes junction box - see line drawing. Requires 7.64 in. H x 2.64 in. W cutout with 2.76in D recess.



Shown in matte gold

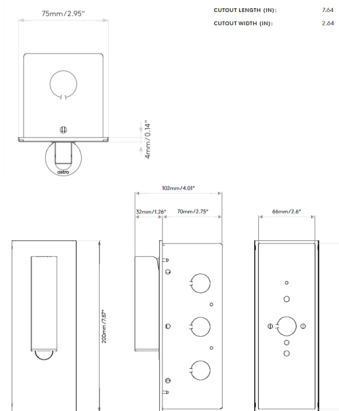

### Specifications

COLOR	N/A
BODY FINISH	Matte Gold
WATTAGE	3.2W
DIMMER	Not Dimmable
DIMENSIONS	2.95"W x 7.87"H x 4.01"D
INTEGRATED LED MODULE	1 x LED/3.2W/120V LED
COUNTRY OF ORIGIN	China



CLICK TO VIEW PRODUCT

Notes: