Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **AST972437**

Approved On: Approved By:

Fuse 3 Recessed Wall Sconce with USB-A Port


By Astro Lighting

Description

The Fuse Recessed Wall Sconce with USB-A Port has an adjustable arm to direct light exactly where you want. A concealed micro switch turns the light off when it is pushed back to its central resting place against the wall when used with a wall dimmer. Includes a recessed junction box. No on/off switch. No driver required.Note: Does not mount to a standard US junction box. Fixture recesses into wall and includes junction box - see line drawing. Requires 7.64 in. H x 2.64 in. W cutout with 2.76in D recess.



Shown in matte gold

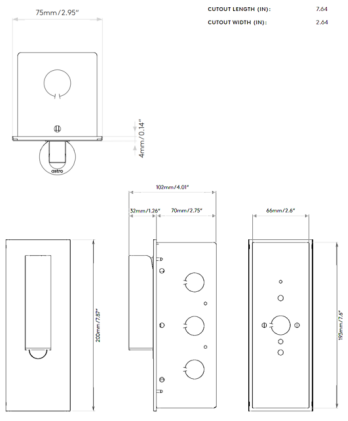

Specifications

COLOR	N/A
BODY FINISH	Matte Gold
WATTAGE	3.2W
DIMMER	Not Dimmable
DIMENSIONS	2.95"W x 7.87"H x 4.01"D
INTEGRATED LED MODULE	1 x LED/3.2W/120V LED
COUNTRY OF ORIGIN	China

CLICK TO VIEW PRODUCT

Notes: