


# MT-3LD211 - 2 Lights

## Mini LED Multiple Spots

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:


### PRODUCT DESCRIPTION

Integral housing adjustable recessed spot light.

### FEATURES

- Energy Star® rated
- Individually adjustable luminaires
- Complete unit includes housing & trim
- All housings are Non-IC rated
- 30° visual cutoff for glare control
- 25° vertical tilt. 350° horizontal rotation.

### PHOTOMETRY



Beam Angle: 25°

### SPECIFICATIONS

**Construction:** Die-cast aluminum heat sink painted black. Trim, housing and junction box are 20 gauge steel. Frame and hanger bars are heavy gauge galvanized steel.

**J-Box (New Construction):** Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch wiring.

**Driver:** 120V Input

**Light Source:** High output LED (included with housing)

**Dimming:** Dim to 10% with electronic low voltage (ELV) dimmer.

**Mounting:** Supplied with hanger bars, adjustable from 14½"-25" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surface up to 1" thick. 8½" x 4½" cutout. See instruction sheet for details on installation using spackle ring.

**Finish:** Abrasion resistant powder coat paint in Black (BK).

**Standards:** ETL & cETL listed.

### FIXTURE PERFORMANCE




Model	Type	Color Temp	Watts	Lumens	Efficacy	CRI
MT-3LD211NA-F30	New Construction	3000K	22W	1510	69 Lm/W	85
MT-3LD211R-F30	Remodel					
MT-3LD211NA-F930	New Construction	3000K	22W	1340	59 Lm/W	90
MT-3LD211R-F930	Remodel					

### ORDER NUMBER

Model#	CRI	Installation	Finish	Trim/Reflector
MT-3LD211NA-F30	85	New Construction (Airtight)	BK	White/Black
MT-3LD211NA-F930	90	New Construction (Airtight)		
MT-3LD211R-F30	85	Remodel	WT	White/White
MT-3LD211R-F930	90	Remodel		



Example: MT-3LD211R-F30-BK

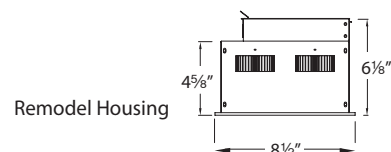

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585