



**DESIGNER**

Gregory Kay

**BRAND**

PureEdge Lighting

**DESCRIPTION**

The Vanishing Point Tubo Large integrates with the Vanishing Point Plaster-In-System for use in drywall applications. Features a .5 inch opening with no visible canopy line -- just the small .5 inch point of connection where the fixture stem disappears into the ceiling. Available in a variety of color temperature options offered in multiple beam spread options that can be changed in the field: 2400K, 2700K, 3000K and 3500K available in Narrow Spot (10 degree), Spot (20 degree), Narrow Flood (35 degree), Flood (45 degree), and Very Wide Flood (75 degree) beam angle options. Note For 7 degree use STB16-BK snoot with NS beam spread. Warm Dim available in Spot (20 degree), Narrow Flood (35 degree), and Flood (45 degree) only. You may feed up to 6 Tubo large fixtures with a single 24VDC remote Universal power supply (power supply required and sold separately). Universal power supply dimmable with ELV/TRIAC/0-10V. Required remote power supply sold separately. Title 24 compliant when used with 2700K color temperature and a Universal power supply. Product is built to order.




Shown in: White

SHADE COLOR	N/A
BODY FINISH	White
WATTAGE	14W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.34"W x 4.92"H
INTEGRATED LED MODULE	
LAMP	1 x LED/24V LED

*Technical Information*

LUMINOUS FLUX	1032 lumens
LUMENS/WATT	73.71
LAMP COLOR	2400K
COLOR RENDERING	97 CRI
BEAM ANGLE	10°

SPEC #	EDG1117925
--------	------------

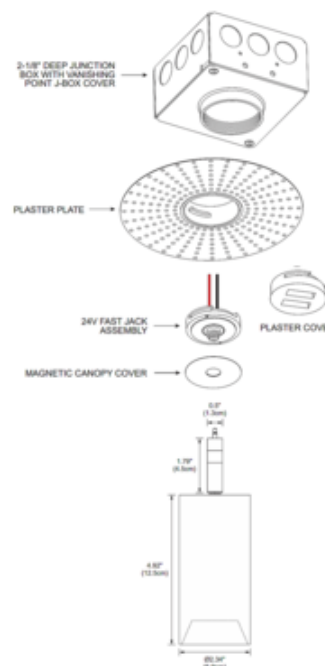

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE