

Lightology

lightology.com
866-954-4489
02-14-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG1354721

Approved On:

Approved By:

Cirrus Wall Wash Suspension w/ Glare Shield Power in Canopy

By PureEdge Lighting




Description

The new generation of the Cirrus Suspension Wall Wash with Shield is precision-engineered to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. The diffused asymmetric wall wash lens provides a smooth and uniform beam spread. Available in 5, 7 or 10 watts per foot, with up to designer-grade 95+ CRI LEDs rendering art and colors in their truest forms. Includes canopy with 120V/24VDC Electronic Low Voltage LED power supply. For fixtures up to 60W, the power supply will fit within the junction box with a 4.6 inch flush canopy.



Shown in satin nickel

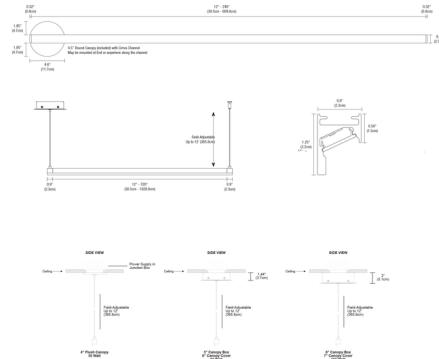

Specifications

COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	49" L x 0.9" W x 1.25" H
INTEGRATED LED MODULE	4 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	255.20
LUMINOUS FLUX	1276 lumens



CLICK TO VIEW PRODUCT

Notes: