

# Lightology

lightology.com  
866-954-4489  
07-18-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG512317**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Tie Stix Wood Vertical Fixed Warm Dim Wall Light

By PureEdge Lighting



### Description

Tie Stix Vertical Fixed Position Warm Dim Wall Light with Square (4SQ), 1 Inch Rectangle (1RE) Canopy, or 2 Inch Rectangle (2RE) canopy features a direct flat, milky white lens and provides an indirect glow. Wood finish options include Cherry, Walnut, White Oak, Espresso and Maple. Canopy and hardware are offered in a variety of finishes. Available in six height options. Square canopy mounts to a standard 4 inch square electrical box with round plaster ring. 1RE mounts to Slim Profile Junction Box (included) in new construction applications. 2RE mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. Includes 5 watts LED per foot available with Warm Dim 2700K or 3000K at 100 percent and dims to 2200K. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an electronic low voltage dimmer, sold separately. ETL listed. ADA compliant. Suitable for damp locations. Made in America. Fixture includes a 5 year warranty. Product is built to order.

### Specifications


COLOR . . . . . Wood Maple  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 5.3W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 4.62"W x 12.6"H x 1.61"D  
INTEGRATED LED MODULE . . . . . 1 x LED/5.25W/24V LED  
COUNTRY OF ORIGIN . . . . . United States

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 54.10  
LUMINOUS FLUX . . . . . 284 lumens



Shown in satin nickel / wood maple

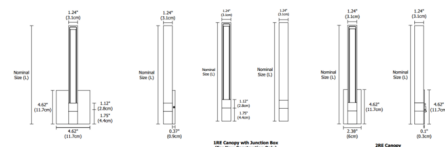

270 and 300

| ORDERING CODE (NOMINAL SIZE) | OVERALL LENGTH (INCHES) |
|------------------------------|-------------------------|
| 12                           | 12.6                    |
| 15                           | 15.6                    |
| 18                           | 18.6                    |
| 21                           | 21.6                    |
| 30                           | 30.6                    |
| 33                           | 33.6                    |
| 45                           | 45.6                    |



CLICK TO VIEW PRODUCT

Notes: