

Lightology

lightology.com
866-954-4489
04-27-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EUF543871**

Approved On: _____ Approved By: _____

PAR20 LED 2X2 Trimless with Remodel Housing By Eurofase



Description

The TE614LED 4 Inch Aperture 4-Light Trimless Square Non-IC Remodel Housing is constructed of 18 gauge powder coated steel and features adjustable mounting clips suitable for 1/2 inch and 5/8 inch drywall. Includes 4-light trimless adjustable trim made of extruded aluminum available in Black or White. Steel mesh plate included. Perforated perimeter of mesh plate allows mud to bond to mounting surface leaving a seamless finish in the ceiling. Includes 4X15 watt, 120 volt LED module with 20 or 40 degree beam angle in 3000K, 3500K or 4000K color temperature, 90+CRI, 4X1290 lumens. 50,000 hour average lamp life. 0-20 degree horizontal adjustment. Class 2 dimmable constant current driver included. Driver box mates to fixture by 24 inch flexible BX cable and has one 1/2 inch and two 3/4 inch knockouts for through branch wiring. Dimmable with a TRIAC dimmer, sold separately. ETL listed. Fixture: 8.38 inch square x 4.88 inch height. 8.56 inch square cutout.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	60W
DIMMER	Standard 120V
DIMENSIONS	8.38"W x 4.88"H x 8.38"D
INTEGRATED LED MODULE	4 x LED/15W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	4.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	344.00
LUMINOUS FLUX	5160 lumens



Shown in white

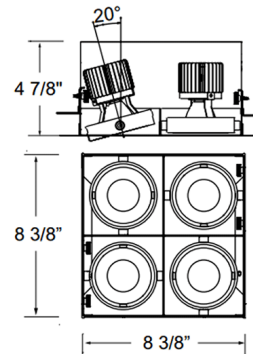

8 9/16"L x 8 9/16"W



CLICK TO VIEW PRODUCT

Notes: