

# Lightology

lightology.com  
866-954-4489  
04-24-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **NOR676353**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Iolite 2IN Remodel IC Air-Tight Housing By Nora Lighting



### Description

The Iolite 2 Inch Remodel IC Air-Tight Housing features steel construction designed for use in insulated ceilings allowing direct contact with thermal insulation. The Iolite is a modular system allowing users to field change both the trim and beam spread without the use of tools. Spot, narrow flood and flood reflectors are included with each trim module. Compatible with 800 lumen and 1000 lumen LED modules. 3.25 inch ceiling cutout. Wet location suitable with compatible trims. Includes a 120-277V power supply with TRIAC/ELV/0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	.....	N/A
BODY FINISH	.....	Steel
WATTAGE	.....	14W
DIMMER	.....	Low Voltage Electronic
DIMENSIONS	.....	10"W x 4.88"H
BULB NOT INCLUDED	.....	1 x LED/14W/120-277V LED

### Technical Information


APERTURE SIZE	.....	2.000"
HOUSING HEIGHT	.....	5"
HOUSING TYPE	.....	Remodel IC
LUMENS/WATT	.....	71.43
LUMINOUS FLUX	.....	1000 lumens



Shown in steel

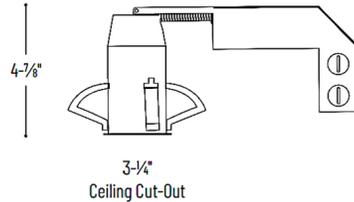

3-1/4"  
Ceiling Cut-Out



CLICK TO VIEW PRODUCT

Notes: