



air  
TIGHT



BRAND

Visual Comfort Architectural

DESCRIPTION

3 Inch Round 90CRI Flanged Wall Wash IC Airtight or Chicago Plenum New Construction Housing for round flanged trims features a flood of illumination for vertical and horizontal illumination along the wall without hotspots, scallops, or shadows. Includes a 12 or 17 watt LED light source. 3 7/8 inch ceiling opening. Suitable for wet locations. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 4"H
INTEGRATED LED MODULE	
LAMP	1 x LED/120-277V LED

Technical Information

LUMINOUS FLUX	675 lumens
LUMENS/WATT	56.25
FUNCTION	Wall Washer
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	4"
APERTURE SHAPE	Round

SPEC #	ELE941454
--------	-----------

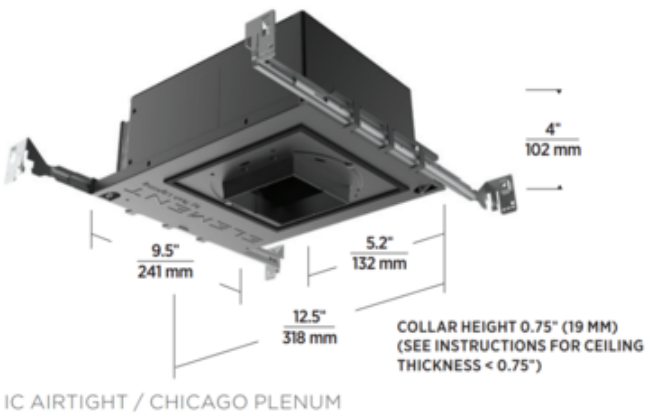

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE