



BRAND

Juno Lighting

DESCRIPTION

6 Inch 900 Lumen 3000K 120 Volt Generation 4 LED IC New Construction Housing is a dedicated LED, Air-Loc sealed new construction housing with integral light engine. Shallow housing allows for fit in 2 x 6 construction. IC new construction housing can be completely covered with insulation. Fully sealed housing stops infiltration and exfiltration of air reducing heating and air cooling costs without the use of additional gaskets. Replaceable light engine mounts directly to housing and incorporates the latest generation high lumen output LED array. Comparable light output to 75 watt PAR30 incandescent while consuming less than 16 watts. Wide flood distribution shipped as standard with optional optic accessories available and sold separately. 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers. Note: A complete fixture requires a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	16W
DIMMER	Dimmable
DIMENSIONS	15.75"L x 9.1"W x 5.1"H
INTEGRATED LED MODULE	
LAMP	1 x LED/16W/120V LED

Technical Information

LUMINOUS FLUX	900 lumens
LUMENS/WATT	56.25
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
LAMP LIFE	50000 hours
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC

SPEC #	JUN111064
--------	-----------

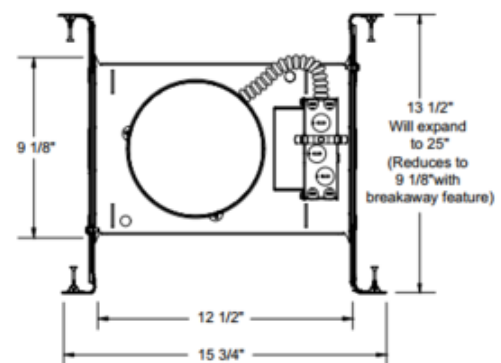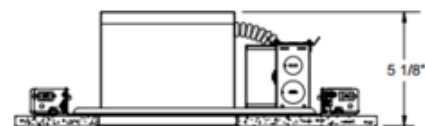

6 7/8" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE