

Lightology

lightology.com
866-954-4489
07-30-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **LTL19068**
Approved On: _____ Approved By: _____

Lytecaster 1102TH1R 6.75 Inch CFL Remodel Frame-In Kit

By Lightolier by Signify



Description


Lytecaster 1102TH1R 6.75 Inch 120 Volt Compact Fluorescent Non-Insulated Ceiling Remodel Frame-In Kit is made of galvanized steel. Accommodates existing ceilings up to 1.5 inch thick. Includes single 2-lamp HPF magnetic non-dimmable ballast for use with two 13 watt compact fluorescent lamps. Input wattage: 31 watts. Input Current: .280A. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from fixture sides and wiring compartment and must not be placed above fixture as to entrap heat. Push-in/twist-out clips hold reflector flush to ceiling. Quick release L shaped cover for access to wiring. Includes mounting bars and adhesive backed aperture template. UL listed. Suitable for damp locations. Compact fluorescent lamping type and wattage dependent on trim and frame-in kit combination per attached manufacturer spec. A complete fixture consists of a frame-in kit and trim kit, sold separately.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	26W
DIMMER	Not Dimmable
DIMENSIONS	8"W x 3.75"H
BULB NOT INCLUDED	2 x T4/GX23/13W/120V Compact Fluorescent

Technical Information

HOUSING HEIGHT	4"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim

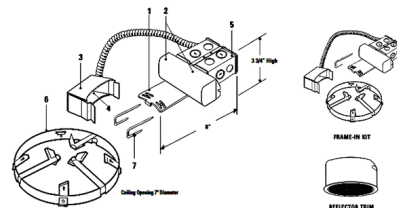

Notes: