




**BRAND**

PureEdge Lighting

**DESCRIPTION**

Soft Line LED System for Indirect Lighting uses RGB to provide soft, ambient, indirect illumination for decorative and architectural applications. For compact shipment and storage, Soft Line coils like a retractable tape measure. When uncoiled, the Soft Line becomes a 1.25 inch wide cupped, rigid aluminum channel that can be mounted on any angle between opposing wall, ceiling or floor surfaces. Soft Line is field-cuttable. Max length 16 feet before re-feeding at both ends. SLD-RGB features a double row of 24 volt Soft Strip in Red, Green & Blue colors. SLD-RGB kit includes Soft Line channel, a pair of power feed and non-power feed turnbuckles and a double row of RGB LED Soft Strip. Soft Line 24 inch standoff, sold separately. Turnbuckles support Soft Line on any angle from 0-60 degrees, feed power from one end and mount to a standard 4 inch square electrical box with round plaster ring. Turnbuckles may be reversed and mounted (opposite the power feed) to a ceiling, wall or floor. System is powered by a remote RGB Power Supply with DMX Driver. CDMX1-RGBW, CDP and CTP Controller options send commands to RGB drivers for color changing Soft Strip. Power supply, standoff, and controller sold separately.

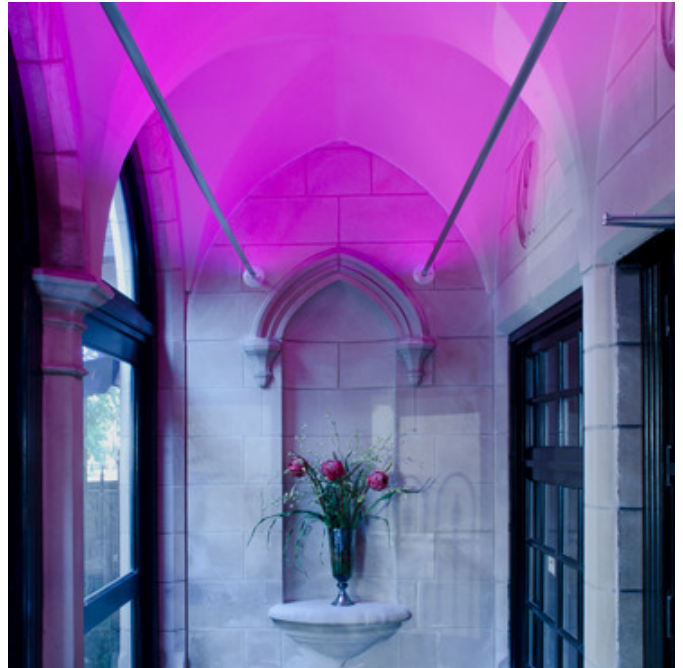

<b>SHADE COLOR</b>	N/A
<b>BODY FINISH</b>	Satin Aluminum
<b>WATTAGE</b>	52W
<b>DIMMER</b>	Dimmable
<b>DIMENSIONS</b>	120"L x 1.25"W x 1.5"H
<b>INTEGRATED LED MODULE</b>	
<b>LAMP</b>	10 x LED/5.2W/24V LED

*Technical Information*

<b>LAMP LIFE</b>	50000 hours
------------------	-------------

<b>SPEC #</b>	EDG69738
---------------	----------

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE