


Lytecaster 2000LV 3.75 IN MR16 Non-IC Standard Frame-In Kit

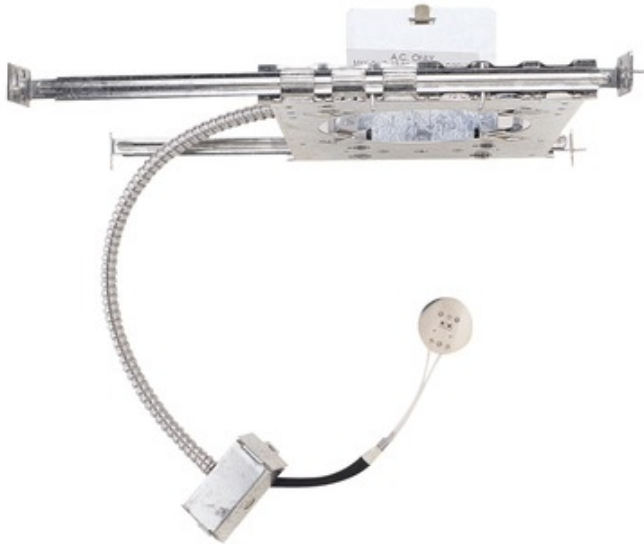

Description:

2000LV Lytecaster 3.75 Inch Low Voltage MR16 Non-IC Standard New Construction Frame-In Kit is made of 20 gauge galvanized steel and will accommodate existing ceilings up to 1 inch thick. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes magnetic low voltage transformer, removable from below. UL listed. Suitable for damp locations. 3 11/16 inch ceiling opening. 9 5/8 inch length x 7.5 inch width. Overall height dependent on selected trim option. Lamp type and wattage dependent on trim kit and frame-in kit combination per attached manufacturer spec sheet. A complete fixture consists of a trim kit and frame-in kit, sold separately. Dimmable with low voltage magnetic dimmer if used with a halogen MR16 lamp.

Shown in: Galvanized Steel

List Price: \$200.49
Our Price: \$120.29

Shade Color: N/A
Body Finish: Galvanized Steel
Lamp: 1 x MR16/GU5.3 (bipin)/50W/12V Halogen
 1 x MR16/GU5.3 (bipin)/12V LED
Wattage: 50W
Dimmer: Dimmable
Dimensions: 9.6"L x 7.5"W

Technical Information

Ceiling Type: Drywall with Trim
Housing Type: New Construction NON IC
Housing Height: 4"
Aperture Size: 0.000"
Product Dimensions: 3.69 inch ceiling cutout

Product Number: LTL19222			
Company:		Fixture Type:	Date: Mar 19, 2018
Project:		Approved By:	

#1224RS-2000LV-000XX-XXXX

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com