



### BRAND

Juno Lighting

### DESCRIPTION

TC1 4 inch Non-IC New Construction Housing is designed for use in non-insulated areas. If installed where insulation is present, the insulation must be pulled back 3 inches from all sides of the housing. Accommodates ceiling thickness up to 1.25 inch. One 120 volt, PAR20, R20, PAR16, R14 intermediate or R16 intermediate medium base halogen/incandescent or LED equivalent are required, but not included. GU10 MR16 halogen or LED equivalent option available when used with GU10 socket whip accessory. Halogen/incandescent lamps dimmable with a standard incandescent dimmer. Consult lamp manufacturer for dimmer compatibility when using LED equivalent lamp. UL listed for through-branch wiring, damp locations and IP. Trims 11, 12, 4101, 4012 and 4181 are wet location approved for covered ceiling applications. Trims 14 and 17 are wet location approved for covered ceiling applications when used with outdoor rated lamps. 12.1 inch length x 6.75 inch width x 5.4 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Aluminum

TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	N/A
DIMMER	Dimmable
DIMENSIONS	11.75"L x 6.75"W x 5.25"H
BULB NOT INCLUDED	
LAMP	1 x PAR20/Medium (E26)/120V Halogen 1 x MR16/GU10/120V Halogen 1 x MR16/GU10/120V LED 1 x R16/E17 (Intermediate)/120V Incandescent 1 x PAR20/Medium (E26)/120V LED

### Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	6"
PRODUCT DIMENSIONS	Cutout: 4.50 inch

SPEC # JUN26374

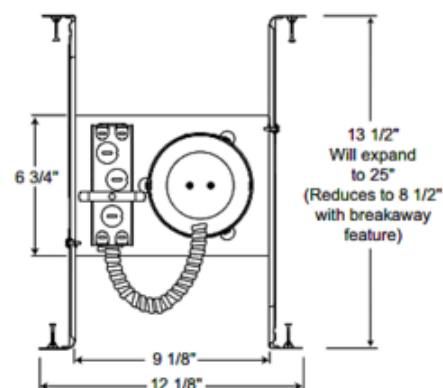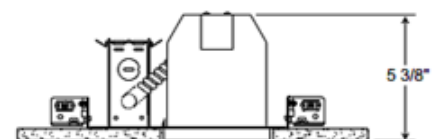

4 1/2" CEILING CUTOUT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE