

TC20 5 Inch New Construction Non-IC Housing



Description:

TC20 5 Inch Universal Non-IC New Construction Housing is designed for use in non-insulated areas. If installed where insulation is present, the insulation must be pulled back 3 inches from all sides of the housing. Accommodates ceiling thickness up to 1 inch. One 120 volt, A19, BR30, PAR30, PAR20, R20, PAR30L or A15 medium base lamp or LED equivalent is required, but not included. Lamp type and wattage dependent upon housing/trim combination (see attached Juno manufacturer specification). Incandescent/halogen dimmable with a standard incandescent dimmer. Consult lamp manufacturer for dimmer compatibility when using an LED equivalent lamp. UL listed for through-branch wiring, damp locations and IP. Trims 210N, 211 and 212N are wet location approved for covered ceiling applications. Trims 215 and 216 are wet location approved for covered ceiling applications when used with outdoor rated lamps. 11.9 inch length x 6.75 inch width x 7.5 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Aluminum

List Price: \$18.76
 Our Price: \$11.26

- Shade Color: N/A
- Body Finish: Aluminum
- Lamp:
 - 1 x A19/Medium (E26)/120V Incandescent
 - 1 x A19/Medium (E26)/120V LED
 - 1 x BR30/Medium (E26)/120V Halogen
 - 1 x BR30/Medium (E26)/120V Incandescent
 - 1 x BR30/Medium (E26)/120V LED
 - 1 x PAR20/Medium (E26)/120V Halogen
 - 1 x PAR20/Medium (E26)/120V LED
 - 1 x PAR30L/Medium (E26)/120V Halogen
 - 1 x PAR30L/Medium (E26)/120V LED

Technical Information:

- Ceiling Type: Drywall with trim
- Housing Type: New Construction Non-IC
- Housing Height: 7.5 inch
- Aperture Size: 5.63 inch
- Product Dimensions: 5.63 inch ceiling cutout

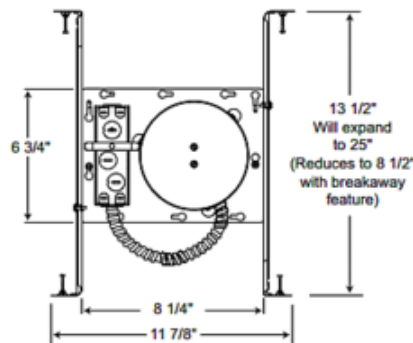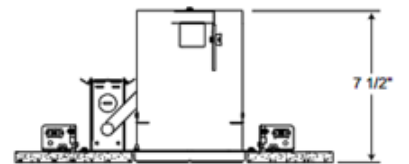

5 5/8" CEILING CUTOUT

Product Number: JUN26382			
Company:		Fixture Type:	Date: Apr 25, 2018
Project:		Approved By:	