

# IT5000CM 2.5 Inch 20W MLV Non-IC Remodel Shallow Housing



**Description:**



IT5000CM 2.5 Inch Low Voltage Non-IC Remodel Shallow Housing is equipped with thermal protection and is designed for remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer is included. One 20 watt, 12 volt GU4 MR11 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Suitable for damp locations. UL listed. 2 5/8 inch ceiling cut out. 11.75 inch length x 3.7 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Galvanized Steel

List Price: \$91.00  
 Our Price: \$65.52

Shade Color: N/A  
 Body Finish: Galvanized Steel  
 Lamp: 1 x MR11/Bipin/20W/12V Halogen  
 Wattage: 20W  
 Dimmer: Low Voltage Magnetic  
 Dimensions: 11.75"L x 3.25"H x 3.7"W

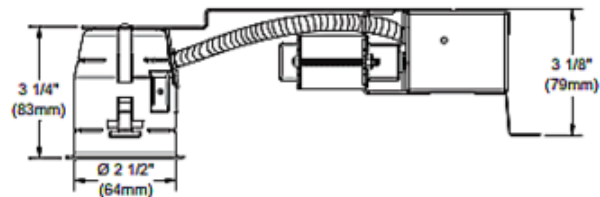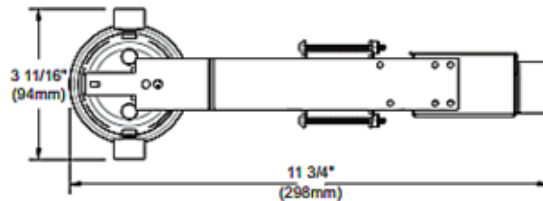

**Technical Information**

Ceiling Type: Drywall with Trim  
 Housing Type: Remodel NON IC  
 Housing Height: 4"  
 Aperture Size: 2.500"  
 Product Dimensions: Cutout 2 5/8"

Product Number: <b>CLT3808</b>			
Company:		Fixture Type:	Date: Mar 24, 2018
Project:		Approved By:	

#0314RE-IT5000-011H1-OOMT

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com