



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Stratus Linear Outdoor Wall Grazer is a Non-IC rated fixture designed for use in recessed cove or surface mount applications for new residential, new commercial, and remodel. Lights textured walls up to 30 feet high. Available in 1 foot and 4 foot lengths in 3000K or 4200K color temperature with field replaceable LED. Link multiple Stratus fixtures to create long runs. Included components: Wall mounting bracket, housing, joiner bracket, reflector, LED panel, one internal 0-10V power supply, and louver. Note: End caps sold separately. Feed fixture with 120-277VAC. Dimmable with a 0-10V dimmer, sold separately. Suitable for outdoor damp or covered locations. Product is built to order.




Shown in: Aluminum

SHADE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	15W
DIMMER	0-10V
DIMENSIONS	12"L x 5.6"H x 5.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/15W/120-277V LED


Technical Information

LUMINOUS FLUX	670 lumens
LUMENS/WATT	44.67
LAMP COLOR	3000K
COLOR RENDERING	90 CRI

SPEC #	EDG57712
--------	----------



STRATUS
LED LINEAR WALL GRAZER
INCLUDED COMPONENTS

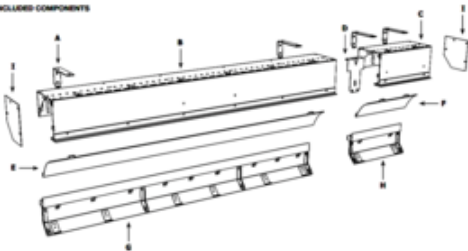

- A. WALL MOUNTING BRACKET**
For all three types of installation conditions: new residential, new commercial, and remodel.
- B. 4" HOUSING**
Non-IC, 0.08" thick die-formed aluminum.
- C. 1" HOUSING**
Non-IC, 0.08" thick die-formed aluminum.
- D. JOINER BRACKET**
Join multiple lengths of Stratus fixture.
- E. 4" REFLECTOR**
Precision-cut aluminum.

- F. 1" REFLECTOR**
Precision-cut aluminum.
- G. 4" LED PANEL**
Integrated 3000K, 4000K, or RGB LEDs.
- H. 1" LED PANEL**
Integrated 3000K, 4000K, or RGB LEDs.
- I. END CAP**
Sold in pairs. Required at end of run.
(END CAPS SOLD SEPARATELY)

(SOLD SEP)

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE