

Pendant Luminaire (for use with E26 base style lamps, 60W MAX)

Models: CALP05, CALP09, CLEP, ISLP & LOLP

Surface Mount

120VAC / 60Hz

Safety Precautions

Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.

It is recommended that a qualified electrician perform all wiring. This fixture must be wired in accordance with all national and local electrical codes.

Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.

This fixture is designed for use in a 120VAC, 60Hz fused circuit.

To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) contact between this fixture and the ground connection of your main power supply panel.

This fixture is intended to be used for general indoor lighting in dry or damp locations only.

ASSEMBLY INSTRUCTIONS

1. Preparing for installation

- Disconnect electrical power** at fuse or circuit breaker box before installing or servicing any part of this fixture.
- Carefully remove the fixture from the carton, and check that all parts are included.
- Separate the fixture (1) from the gem bar (2) by removing the canopy screws (3).
- Mount the gem bar (2) to the junction box (not provided) using the screws provided.

2. Wiring – all wiring must take place inside junction box

Caution: Make sure power is off at fuse or circuit breaker box. Check power wires for damage or scrapes. **Note:** Most dwellings built before 1985 have supply wire rated to 60°C. Consult a qualified electrician before installing.

- Using wire nuts (provided) connect the power source ground wire to the green or bare copper wire from the fixture assembly.
- Using wire nuts (provided) connect white supply wire to white fixture lead. Connect black supply wire to black fixture lead. **Do not mix wires.** Pull on each wire lead to make sure connections are secure. Make certain no bare wires are exposed outside of wire connectors.
- Tuck all connections neatly into junction box.


3. Mounting

- Place fixture canopy (1) over the gem bar (2) and align the mounting holes on both sides of the canopy.
- Secure the fixture using the canopy screws (3).
- Add lamp (not included) to socket (inside diffuser) by twisting until hand tight.

4. Restore power at fuse or circuit breaker box

5. Maintaining diffusers

- Periodically dust the diffuser with a clean, dry cloth. Wipe clean with a damp cloth as needed. Never use abrasive cleaners.

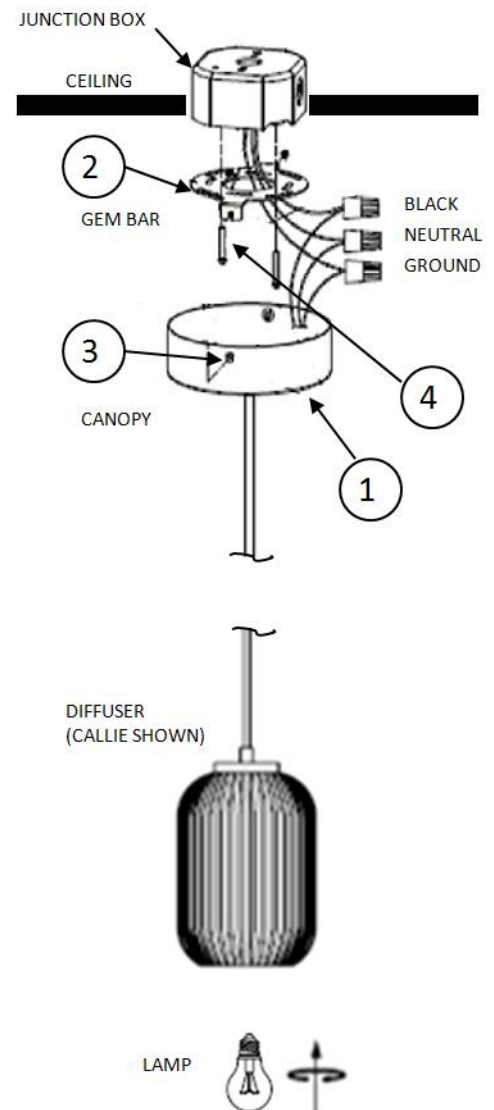

Limited Factory Warranty

AFX Inc. warrants this fixture is free from defects in materials and workmanship when installed and used under normal operating conditions for a period of 5 years from date of purchase. This warranty covers all component parts and extends only to replacement of defective fixture or components; it does not cover failure due to improper installation, misuse, mishandling or damage incurred in transit