


# ASSEMBLY INSTRUCTIONS FOR YOUR CLARE SINGLE PENDANT

## IMPORTANT SAFETY INSTRUCTIONS:

- \*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.
- \*Turn off power at switch before replacing bulbs.
- \*If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any
- \*To clean, use soft cloth only. Do not use any chemical or abrasive cleaners.\*\***
- \*We strongly recommend installation by a licensed electrician.
- \*This fixture is UL rated for dry locations.

## ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Remove the mounting plate (A) from the canopy (D) by loosening the screws (C).
4. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
5. Attach ground wire from fixture (green or silver in color) to ground wire from outlet box. Fasten wires together with wire nut (F) and tightly wrap connection with electrical tape.
6. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (F) and tightly wrap connection with electrical tape.
7. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (F) and tightly wrap connection with electrical tape.
8. Install one 60W MAX. Type A bulb into the socket located inside of shade (E).

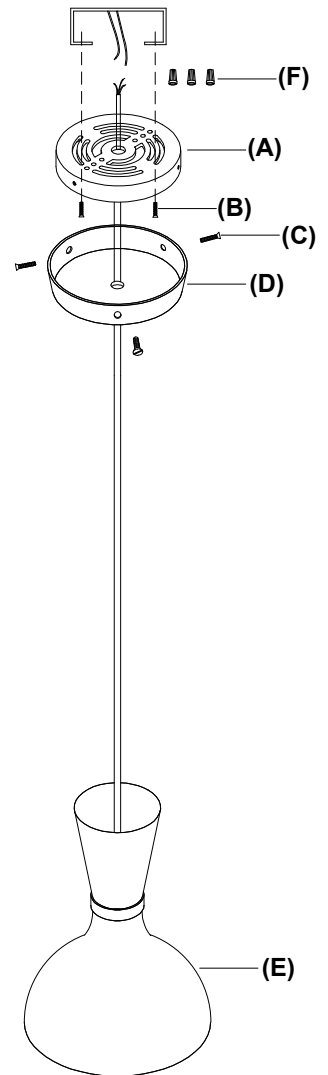

**\*\*To clean, use soft cloth only. Do not use any chemical or abrasive cleaners.\*\***

**BB01BB**