


Unity™ Lighted Mirror

Product Specifications: Residential

CORDOVA®
BY ELECTRIC MIRROR

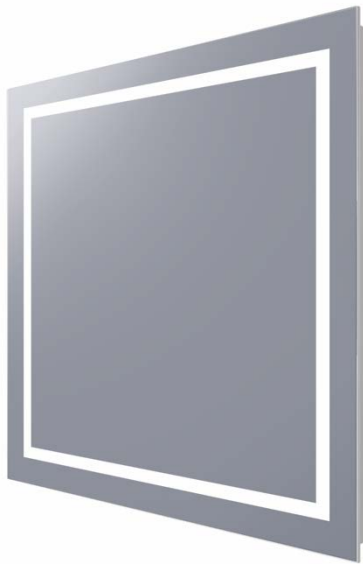

PRODUCT DESCRIPTION

Add Unity™ to your aspiring design and bring together any space with radiant bliss. This polished-edge lighted mirror showcases a continuous band of 1" wide frosted light inset from a precision border.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting. Mirror shall have uniform light output in frosted areas, using replaceable LEDs with greater than or equal to 90 CRI (color rendering index).

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

FEATURES AND BENEFITS

- Copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Energy efficient
- Easy installation
- In stock Unity mirrors ship within 1 week
- 5-year limited warranty
- Designed in the USA
- Covered by one or more patents

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Forward-phase dimmable, replaceable LEDs
- CRI: 90+
- CCT: 3,000 Kelvin
- 608 lumens per foot
- L₇₀ 50,000-hour LED lifespan
- Maximum 86 lumens per watt efficacy

SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- Safety-backed mirror

INSTALLATION SPECIFICATIONS

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Fixture should be controlled by an on/off switch

MODELS

Base Model	Dimensions*	Power Requirements
UNY2436	24"W x 36"H x 2"D (610mm x 914mm x 51mm)	120/240 VAC, 49W
UNY3636	36"W x 36"H x 2"D (914mm x 914mm x 51mm)	120/240 VAC, 63W
UNY4836	48"W x 36"H x 2"D (1219mm x 914mm x 51mm)	120/240 VAC, 76W

*Due to mirror chassis hanging system, mirror can only be installed in width and height orientation specified; it can't be rotated 90° to swap width and height dimensions.

DIMENSIONAL DRAWING (Not to scale.)

