

JAMIE YOUNG CO

Reservoir Chandelier

5RESE-CHCL

SAFETY, INSTALLATION & CARE INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

We strongly recommend that all direct-wired lighting products be installed by a licensed electrician.

Two people may be required for installation. DO NOT EXCEED the rated bulb wattage. Keep flammable materials away from bulb. This light fixture is shipped with all internal wiring intact. Do not open the product or alter the wiring in any manner.

Installation requires an electrical junction box in the ceiling sufficient to support the weight of the light fixture. This fixture weighs: 14.3 lb. /6.5Kg.



WARNING: Be certain that the power to the electrical junction box is turned off at the circuit breaker before installation. Turning the power off at a light switch is not sufficient to prevent electrical shock.

CAUTION:

Prior to installation, locate ALL PARTS INCLUDED before disposing of packaging materials.

Tools Required for Installation (Not Included):

Phillips and Flat-blade Screwdrivers	Pliers
Electrical Tape	Adjustable Wrench
Wire Cutters	Drill

Note: Additional wiring supplies may be required.

Parts Required (not included):

Part	Qty.	Description	Part	Qty.	Description
(I)	1	Junction Box	(III)	1	Hot Junction Box Wire
(II)	1	Ground Junction Box	(IV)	1	Neutral Junction Box

Parts Included/Referenced (See Figure 1):

Part	Qty.	Description	Part	Qty.	Description	Part	Qty.	Description
(A)	9	Socket	(F)	1	Mounting Bracket	(L)	3	Wire Connectors
(B)	9	Glass Shade	(G)	2	Mounting Screws	(M)	1	Back Plate
(C)	9	Ring	(H)	1	Ground Screw	(N)	1	Canopy
(D)	9	Light Bulb (Not Included)	(I)	1	Ground Wire	(O)	2	Plastic Washer
(E)	3	Center Pipe	(J)	1	Hot Fixture Wire	(P)	2	Nut
			(K)	1	Neutral Fixture Wire	(Q)	2	Finial

Important Safety Instructions:

For your safety, use of a two-person installation team is strongly recommended.

This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.

This fixture has been rated for up to five (9) 25W-maximum Type G incandescent light bulb(D) (not included). To avoid the risk of fire, do not exceed the recommended wattage.

This fixture is meant for indoor use in dry locations only.

JAMIE YOUNG CO


Reservoir Chandelier

5RESE-CHCL

SAFETY, ASSEMBLY, CARE, AND TROUBLESHOOTING

Installation Procedure:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. TAKE THE PARTS CAREFULLY OUT OF THE CARTON, PLACE THEM ON A FLAT SURFACE, AND MAKE SURE THE PARTS WILL NOT BE DAMAGED.
3. REMOVE THE ROUND FINIAL UNDER THE CANOPY FROM THE MOUNTING SCREWS, AND TAKE OUT THE UNIVERSAL BAR. ATTACH THE UNIVERSAL BAR TO THE OUTLET BOX BY USING TWO OUTLET BOX SCREWS.
4. INSTALL THE GROUND WIRE IN THE UNIVERSAL BAR WITH THE SUPPLIED GREEN GROUND SCREW.
5. PLACE THE NULL WIRE, WHITE WIRE EVENLY AGAINST THE NULL WIRE FROM THE OUTLET BOX AND PLACE THE LIVE WIRE, BLACK WIRE EVENLY AGAINST THE LIVE WIRE FROM THE OUTLET BOX.
6. AFTER THE WIRES ARE CONNECTED. PULL THE BEIGE FABRIC WIRE TO ADJUST THE LENGTH, TIGHTEN IT BY THE HASP. TUCK THEM CAREFULLY INSIDE THE OUTLET BOX.
7. ATTACH THE CANOPY TO THE MOUNTING SCREWS AND SECURE WITH TWO BALL FINIALS.
8. ROTATE THE CENTER PIPE INTO CORRESPONDING TOOTH ROD, MAKE SURE THE CENTER PIPE IS CENTERED AND LEVEL TO AVOID CROSS THREADING.
9. SECURE THE GLASS SHADE INTO SOCKET WITH RING TIGHTLY.
10. INSTALL 9*25W, E12 BULBS TYPE G (NOT INCLUDED) INTO THE SOCKET OF THE FIXTURE, IN ACCORDANCE WITH THE FIXTURE'S SPECIFICATIONS.

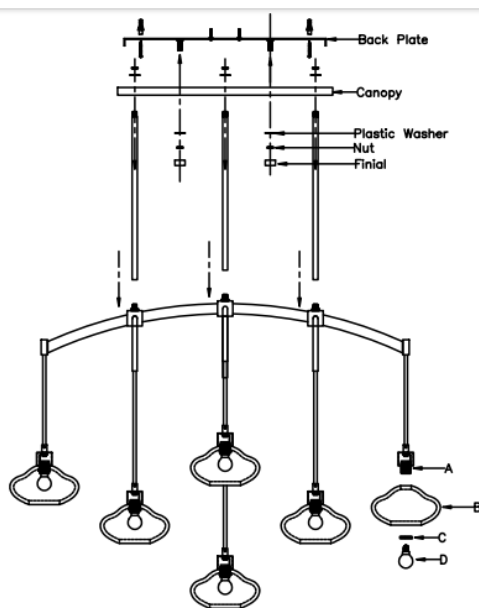

CARE & CLEANING:

To clean, wipe the fixture ONLY with a soft, dry cloth.