



1718 W. Fullerton Chicago, IL 60614
 Ph: 773.770.1195 • Fax: 773.935.5613
 www.PureEdgeLighting.com • info@PureEdgeLighting.com
 © 2016 PureEdge Lighting. All Rights Reserved.


Installation Instructions for T24M Turbo Large Track Head

T24M-TUBL_


IMPORTANT INFORMATION

- This product is suitable for indoor locations.
- Ensure that power to the electrical box is **OFF** before beginning installation.
- These lighting fixtures must be used with PureEdge Lighting 24 volt magnetic track system only.
- This product is dimmable when the system is powered with PureEdge 0-10 volt, ELV and Universal power supplies.


SAVE THESE INSTRUCTIONS!




Section One: Replace the Lens

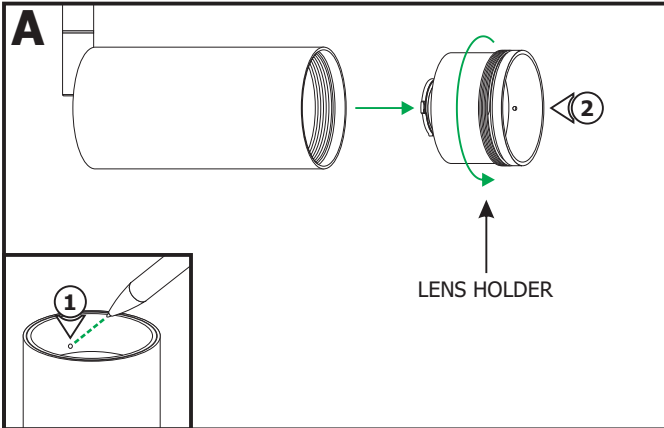

- 1: Use a pen or small Allen wrench to loosen the lens holder.
- 2: Unscrew the lens holder counter-clockwise and remove it from the fixture.

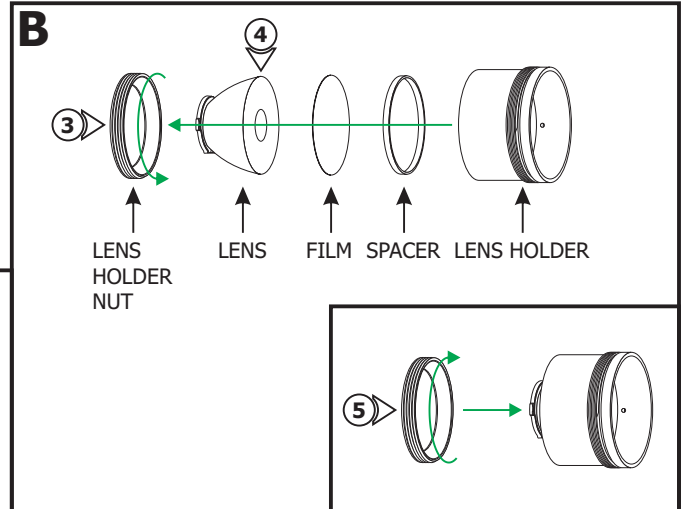


- 3: Unscrew the lens holder nut counter-clockwise and remove the lens, film, and spacer.
- 4: Replace the lens. Place the film and spacer in front of the lens and into the lens holder.
- 5: Screw the lens holder nut back into the lens holder clockwise to secure in place.

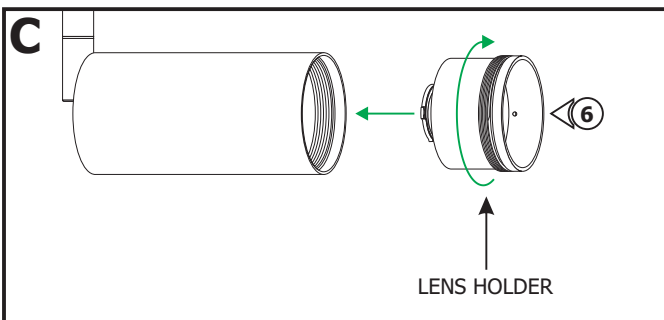


- 6: Screw the lens holder back clockwise to secure in place.

Section Two: Install the Track Head

D

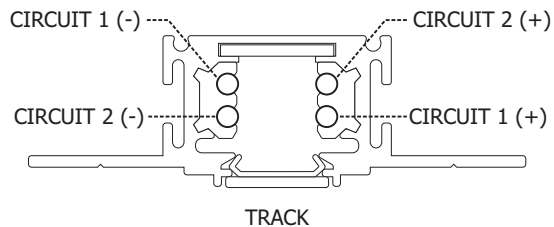


TRACK HEAD CONNECTOR



CIRCUIT 1

TRACK HEAD CONNECTOR



CIRCUIT 2

NOTE: Refer to the instructions provided with the track to install the system.

2: If necessary, unscrew the track head connector and remove the cover. Paint the cover to match the drywall paint.

3: Place the cover back onto the magnetic track connector.




4: Plug the track head connector into the magnetic track connector. Use fingers to tighten the connector and secure in place.

5: Insert the magnetic track connector into the track. The magnets on the back will keep the connector in place.


NOTE: DO NOT place the magnetic track connector over LED Soft Strip.

1: Identify the line on the Track Head Connector Cover that denotes Circuit 1 or Circuit 2. Choose Circuit 1 or Circuit 2 to power the track head fixture by rotating the track head connector 180 degrees.

E

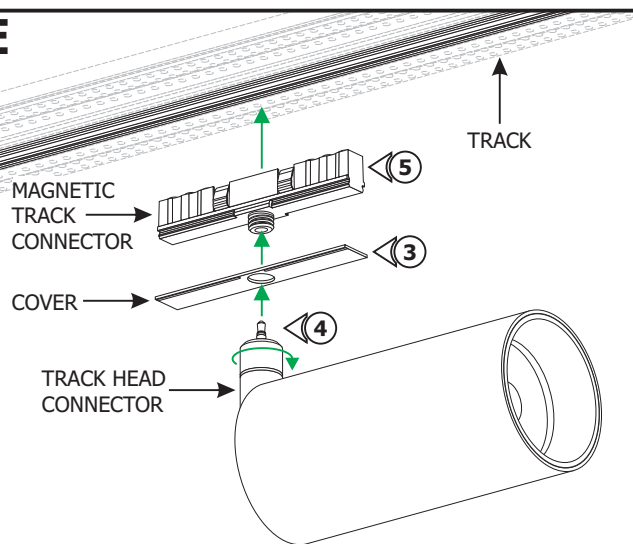

F

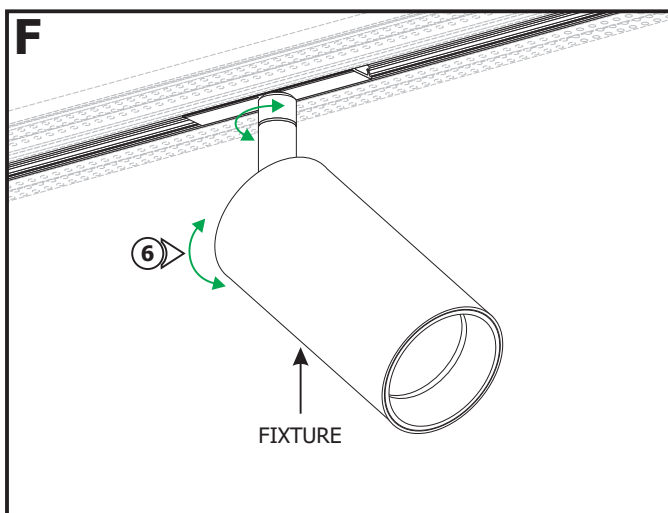

6: Adjust the fixture to the desired position by rotating the body vertically or horizontally.

7: Turn the power on.

NOTE: This fixture consumes **15** watts and contains integrated LED lamps which are rated for 50,000 hours.