




Assembly and Installation Instructions for Model's

10030PN

Warning please make sure the electrical breaker is shut off before commencing with this installation

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

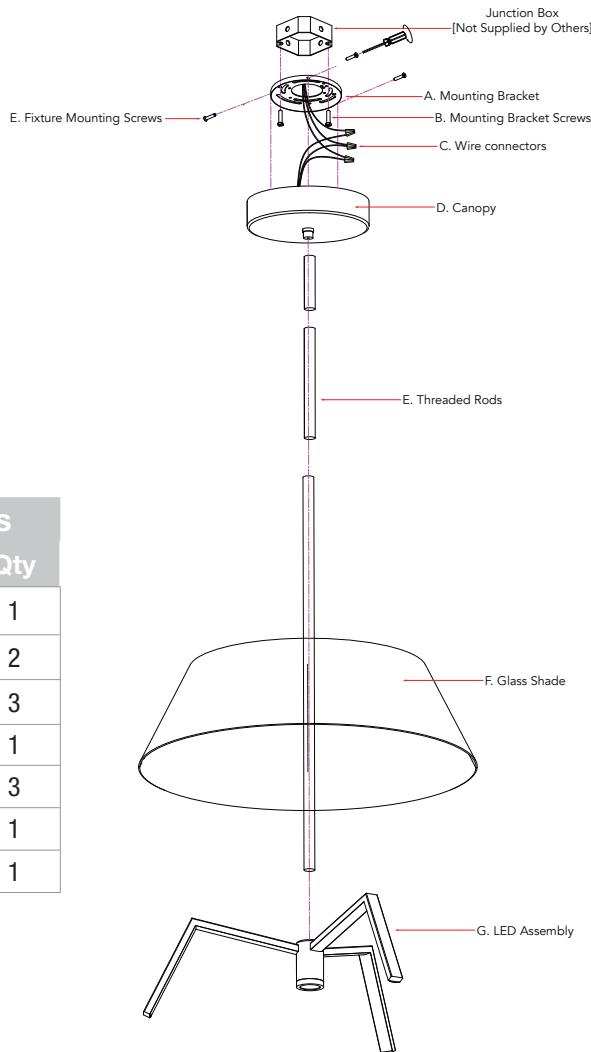

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Electrical connectors	3
D	Canopy	1
E	Threaded rods	3
F	Glass shade	1
G	LED assembly	1

Installing the fixture

please ensure the electrical breaker is in the Off position before commencing

- 1 Measure how low you would like your pendant to hang and select the desired lengths of threaded rods to use. Note: The height cannot be adjusted after installation. Screw together the Threaded rods (**E**) then screw them to the bottom of the Canopy (**D**).
- 2 Attach the Mounting bracket (**A**) to the Junction box using the Mounting bracket screws (**B**).
- 3 Connect the supply wires to the fixture wires using the supplied electrical wire connectors (**C**). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 4 Secure the Canopy (**D**) to the Mounting bracket (**A**) using the Fixture mounting screws (**E**).
- 5 Place the Glass shade (**F**) over the LED assembly (**G**) and screw the Threaded rods (**E**) to the LED assembly.
- 6 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.