


SKYVIEW™ Pendant Pro

Commercial Circadian Lighting Solution

1.5 melanopic ratio
(daytime)

0.35 melanopic ratio
(evening)

8,000 lumens
(light output)

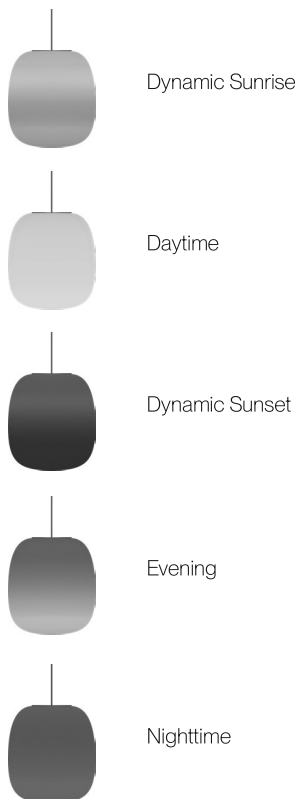

SKYVIEW is tuned for your wellness

SKYVIEW® Pendant Pro is the ultimate commercial wellness lighting solution. SKYVIEW Tile was engineered to meet the wellness criteria of IESNA RP-46 m-EDI > 250 lux within 8' distance from the Pendant Pro, making it ideal for conference rooms, gathering areas, and lobbies. Moreover, using SKYVIEW's patented color operation technology to achieve a melanopic Daylight Efficiency Ratio (m-DER) of 1.5, provides the m-EDI of 250 lux at a comfortable 16.5 vertical FC.

Biological Benefits

- Strengthens Circadian Rhythm
- Increase Alertness
- Enhances Productivity
- Boosts Mood
- Promotes A Better Nights Sleep

Dimensions


- Fixture: 21.24"H x 19.00" diameter
- 18.6 lbs
- 10" and can be cut down

Primary Applications

- Conference Rooms
- Gathering Areas
- Lobby
- Wellness Areas



Pendant Pro Application

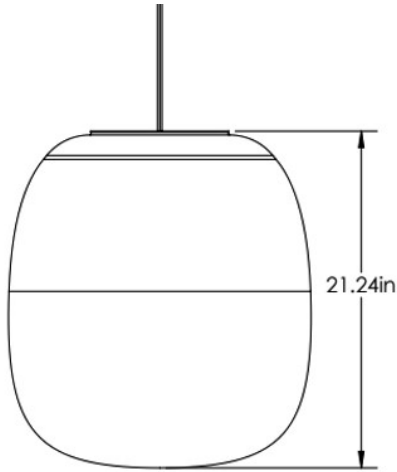

Hotel Lobby



Office Ceiling

Specifications

Characteristics	Pendant Pro	Performance Specifications	Daytime
Lamp Type (included)	BIOS LED	Minimum vertical melanopic equivalent daylight illuminance (m-EDI) with Pendant Pro within 8' distance	250 lx
Lamp Base Material	Aluminum	Minimum Circadian Stimulus (CS) with Pendant Pro within 8' distance	0.35
Diffuser Material	LLDPE Plastic	Daytime melanopic daylight efficiency ratio (m-DER) (vertical)	1.5
Power (w) Consumption	100W	Daytime light output (lumens)	7600 Lm
Voltage	120 - 277 V	Dimmable	Yes/app