



LED 10W (E26) 110V 50-60Hz Fluo. max. 11W (E26) 110V 50-60Hz IP20 Halo. classic. max. 57W (E26) 110V 50-60Hz

0 Clase I

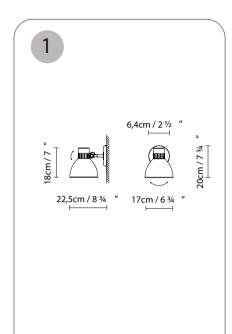

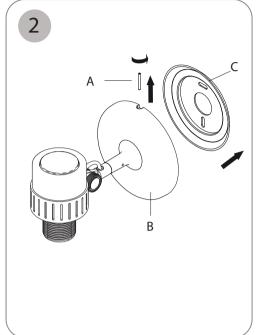

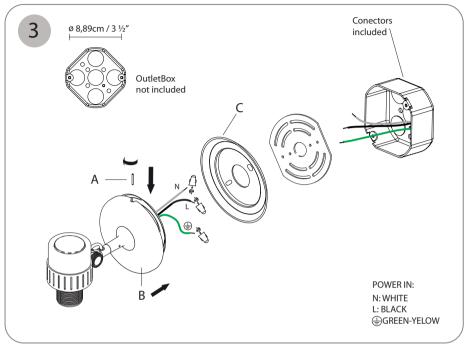

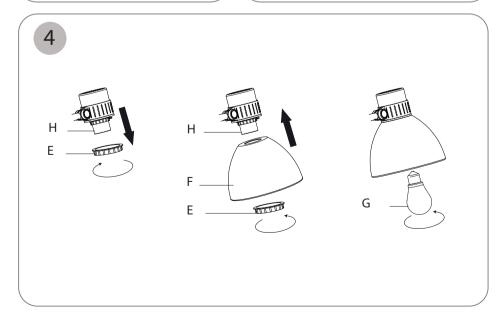

- 1. General dimensions of the lamp.
- 2. Loosen the bolt (A) and detach the base plate (C) from the canopy (B).
- 3. Pass the wire through the support (C). Attach the base plate (C) to the wall using screws. Make the electrical connection and reattach the canopy (B) to the base plate (C).
- 4. To install the shade (F), loosen the ring (E) on the bulb holder (H), insert the shade (F) into the bulb holder (H) and secure it by tightening the ring (E). Screw the bulb (G) into the bulb holder.

Consumer information:

- Lamps without the IP mark are classed as IP20 and are designed for general interior use, except wet areas (bathrooms, etc.)
- Lamps with the IP mark are designed for exterior use and in wet areas. (E.g. IP54)
- •They offer guaranteed protection to people and animals against electrical discharge:
- Class I: through single electrical insulation and an earthing conductor once correctly
- Class II: through double electrical insulation.
- Class III: these kinds of lamps should be connected at very low voltage levels (generally 12V); therefore there is no risk.



Lamps with this symbol, or without any symbols, can be mounted directly onto normally inflammable surfaces.



Lamps with this symbol cannot be mounted directly onto normally inflammable surfaces. • The safety of this lamp is guaranteed by using a maximum wattage bulb that does not exceed the figure displayed visibly on the lamp.



•The product cannot be treated like conventional domestic waste; it must be taken to the corresponding recycling point for electrical and electronic equipment.

Assembly instructions



B.LUX S.A. Pol. Ind. Okamika, pab. 1 48289 Gizaburuaga (Bizkaia) Spain T.(+34) 94 682 72 72 F. (+34) 94 682 49 02 info@grupoblux.com www.grupoblux.com