



2"

45365 MINI SQUARE GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

TYPE:			
DATE:			
NOTES:			



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: ø2 1/8".
- Fixture: ø2 1/2" x 1 1/2"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 5W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- · Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K
- Delivered Lumen: 373 lm |410 lm |421 lm |426 lm |429 lm

CERTIFICATIONS













140K | 150K

ORDERING GUIDE

MODEL	FINISH
45365-027	Black
45365-010	White

BEAM WATTS LUMENS KELVIN DIMMABLE CRI **ADJUSTABLE** ANGLE TRIAC/ELV 38° 30° ø2 1/8' 5W Up to 429 **CCT Selectable** 90+










PRODUCT DIMENSIONS

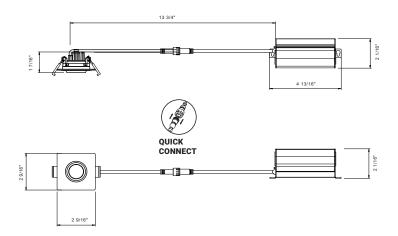

ACCESSORIES



45612-015 60" 3 pin Connector



45366-017 NEW CONSTRUCTION PLATEMounting kit includes bars
9" x 6 3/4"

Ø2 1/8"Ø2 7/8"Ø3 3/4"Ø5 1/4"




NO IC BOX REQUIRED






PHOTOMETRICS


Imperial

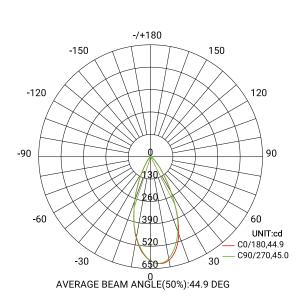


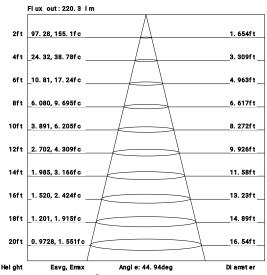

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics

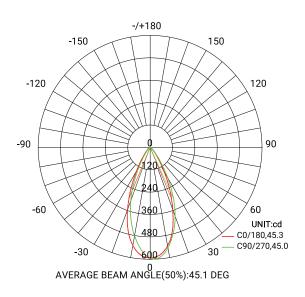

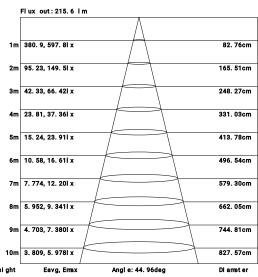

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.