





# **45378 ROUND FIXED DOWNLIGHT**



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

TYPE:		
DATE:		
NOTES:		



## 2700K . 3000K . 3500K . 4000K . 5000K

# **SPECIFICATIONS**

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole: ø6 1/4".
- Fixture: ø7 1/4" x 3"H.

#### **ELECTRICAL**

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)( -20°C~-40°C).

#### LIGHT MODULE

- 1 x 24W Integrated LED COB.
- · Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- · Beam angle: 38 degree.
- 130K 135K 40K Kelvin (CCT): 27K
- Delivered Lumen: 1405 lm |1555 lm |1734 lm |1798 lm |1789 lm

#### **CERTIFICATIONS**















### **ORDERING GUIDE**

MODEL	FINISH
45378-027	Black
45378-010	White

#### BEAM WATTS LUMENS KELVIN DIMMABLE CRI **ADJUSTABLE** ANGLE TRIAC/ELV 38° N0 ø6 1/4' 24W Up to 1798 **CCT Selectable** 90+










PRODUCT DIMENSIONS

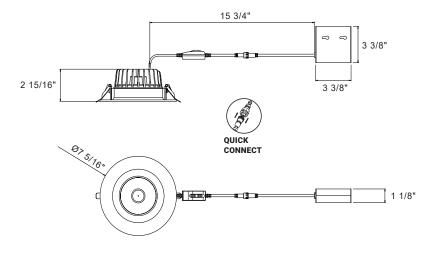

## **ACCESSORIES**



45611-018 2 pin Connector




45380-013 **NEW CONSTRUCTION SMASH PLATE** 17 1/4" x 8 3/8" ø 6 1/4"




NO IC BOX REOUIRED






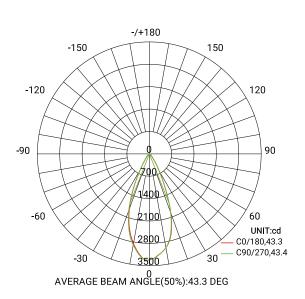


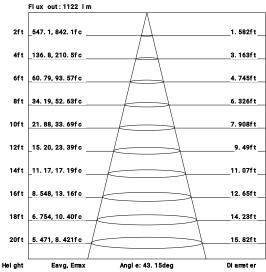

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# Metrics

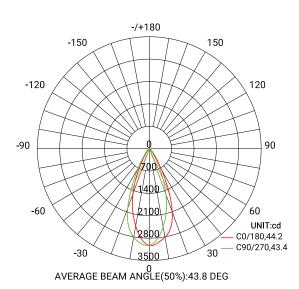

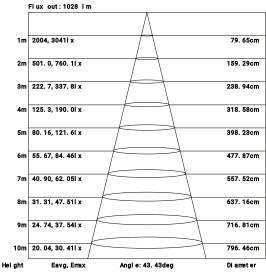

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.