PD39307-UNV

INSTALLATION SHEET

Non-Powered

Ceiling LED Pendant

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


Technical Support: 1-855-855-8926


Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120-277V input

Remove fixture from its original package

- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b) and separate non-power mounting plate (3c) from non-power canopy (5a) by removing screws (5b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package. Secure non-power mounting plate (3c) to non-power junction box (3a) with screws (3e)
- **4.** Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)
- 5. Make proper electrical connections (black to hot "L", white to neutral "N", green to "GND") with wire nuts provided in hardware package
- **6.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b). Secure non-power canopy (5a) to non-power mounting plate (3c) with screws (5b)



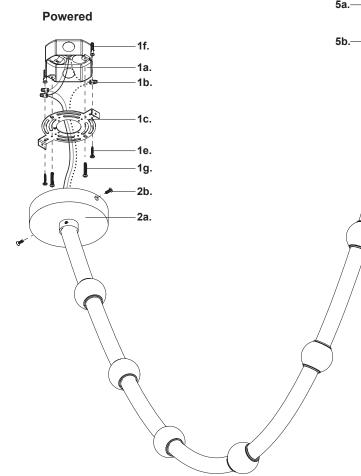



PD39307-UNV-RT

INSTALLATION SHEET

Ceiling LED Pendant

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120-277V input

1. Remove fixture from its original package

- 2. Remote driver (4a) must be installed and voltage wires brought to the mounting location prior to fixture installation. Make proper electrical connections (black to hot "L", white to neutral "N", green to "GND", Dim + to purple, Dim- to gray) with wire nuts provided in hardware package. Secure driver lid (4d) to driver box (4b) with screws (4c)
- 3. Connect LED+/LED- wire from remote driver (4a) to approximate location. Make proper LED+/LED- wire connection with wire nuts provided
- **4.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package. Secure non-power mounting plate (3c) to non-power junction box (3a) with screws (3e)
- Attach canopy (2a) to mounting plate (1c) with canopy screws (2b). Secure non-power canopy (5a) to non-power mounting plate (3c) with screws (5b)

