



SOL-LIGHT® STATIC WHITE

MR16 24V LED LAMP GU5.3



PROJECT

FIXTURE TYPE

DATE

REV 11.25.25



DESCRIPTION

The lamp is a direct replacement for a 24VAC, 50 watt Halogen with 36° (450 Lumens) or 60 Degree (642 Lumens) Beam Spreads. For use in Track Lighting, recessed down lights, and other indoor and outdoor applications. 30,000 hour rated lamp life. Suitable for enclosed fixtures. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

FEATURES

- 3000K Color temperature, 2700K special Order min 100
- 642 Lumens at 3000K, direct replacement for inefficient Halogen Lamps
- GU5.3 Base MR16
- High 97 CRI and high R9 65+
- Low blue emission for healthy vision
- Zero ultraviolet emission, won't fade colors
- Beam Angles 36° or 60°
- 30,000 Hours rating

APPLICATIONS

Track and Recessed Lighting, Residential, Hospitality, Museum & Gallery, Track Lighting, Desk, and Outdoor. Not for use within recessed fixtures with magnetic transformers

LED LAMPING

7.73 Watts at up to 642 Lumens at 3000K



DIMMING

- Phase and Power Dimmable, Percent of Flicker <1%
- Compatible with 24VAC LED Electronic Low-Voltage (use ELV dimmer also called "trailing-edge", or "reverse phase" dimmer) and Magnetic Low-Voltage Transformers (use MLV dimmer also called "leading-edge" or "forward-phase" dimmer) *Not for use within recessed fixtures with magnetic transformers

WARRANTY / LABELS

3 years/30,000 hour warranty

Title 24 Compliant, low flicker <1% CE, UL, NOM

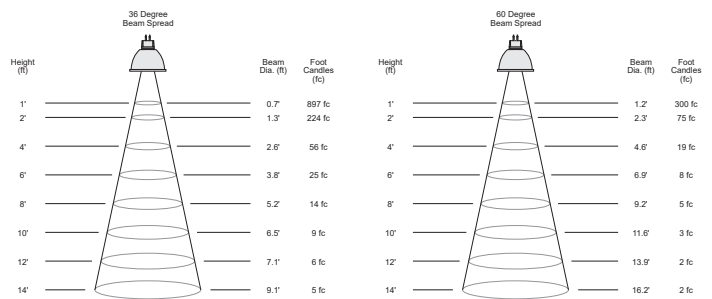

Product	Base/Voltage	Wattage	Beam Spread Lens	Color Temperature	Case Finish
MR16	24V	8W	FL	30K	WH
MR16 MR16 Reflector	24V GU5.3 24VAC	8W 8 Watts	FL 36° Flood Lens WF 60° Wide Flood Lens	30K 3000K	WH White