

# VANISHING POINT TUBO SMALL

## LED 24VDC TRACK HEAD

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING

REV 07.03.24



**VR**  
Vanishing Point .5" Opening Plaster-In

### DESCRIPTION

The Vanishing Point Tubo Small Plaster-In System with integrated LED. Offered in four distinct mounting options for drywall and millwork, the Vanishing Point Tubo Small achieves the most minimal beam connection producing a refined and continuous architecture within any indoor environment. Offered in multiple beam spreads that can be changed in the field. You may feed up to 15 Tubo Small fixtures, with our 24VDC, Class 2 remote power supply. Patent Pending. For custom quotes and layout assistance, send your drawings and ideas to our design team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

### DRYWALL APPLICATIONS (PLASTER-IN)

**VR** - No visible canopy line, just the small (0.5") point of connection where the fixture stem disappears into the ceiling. 24VDC remote power supply (Order Separately).

### MILLWORK APPLICATIONS

**V2MR** - Connection point at ceiling 2.0" canopy sits flush in Millwork ceilings for a clean look. 24VDC remote power supply (order separately).

### LAMPING

	BEAM ANGLE REFERENCE 45°				
<b>COLOR TEMPERATURE</b>	24K	27K	30K	30D	35K
<b>TOTAL LUMENS</b>	485	433	419	287	481
<b>WATTS</b>	8.5	8.5	8.5	7.5	8.5
<b>LUMENS PER WATT (lm/w)</b>	57	51	40.2	38.6	57
<b>CRI</b>	97	92	94	94	98
<b>TM-30 DATA</b>	R9: 60 Rf: 93 Rg: 98	R9: 97 Rf: 92 Rg: 100	R9: 64 Rf: 91 Rg: 98	R9: 90 Rf: 95 Rg: 102	R9: 92 Rf: 94 Rg: 101
<b>LAMP LIFE</b>	60,000 Hours, 70% Lumen Maintenance				

### ACCESSORIES (SOLD SEPARATELY)

Additional lenses can be ordered and changed in the field offered in **NS** (15°), **SP** (25°), **NF** (35°), **FL** (45°), **WF** (60°) beam spread options

### SPECIFICATIONS

- Input Voltage 120VAC/24VDC
- Power Consumption: 8.5 watts (7.5 warm dim)
- Construction: Die Cast Aluminum
- Dimensions: Ø 1.61" Height 3.94"
- Color Rendering: COB Chromaticity range within a 2-step MacAdam Ellipse
- Average LED life: 60,000 hrs

### REMOTE POWER SUPPLIES\*, DIMMERS & CONTROLS (SOLD SEPARATELY)

#### 24VDC, CLASS 2 WIRING

- [JUN Trim Power Supply](#) Universal Dimming (**ELV, TRIAC, 0-10V**)  
ELV & TRIAC [Smart Dimmer & Switch](#)


### APPLICATIONS

Designed for indoor use only. Ideal applications in residential, commercial, retail and hospitality environments include kitchens, living rooms, offices, conference rooms, architectural spaces, lobbies, hotels, restaurants and luxury health spas.

### WARRANTY / LABELS

Pro-rated 5 year warranty. Assembled in America, ETL (Conforms to UL1598 and CSA 22.2 #250.0), RoHs. \*Title24 JA8 listed with universal power supplies in 27K> CCT, Click the link to access our full Title 24 compliance listings: [pureedgelighting.com/resources](http://pureedgelighting.com/resources).

### FINISH



System

Fixture

Beam Spread

Color Temperature

Finish



**VR** Vanishing Point Drywall Plaster-in with .5" opening with Remote Power supply (order separately)  
**V2MR** Vanishing Point 2" Flush canopy for Millwork, with Remote Power supply (order separately)

**TUBS** Tubo Small



**NS** Narrow Spot 15°  
**SP** Spot 25°  
**NF** Narrow Flood 35°  
**FL** Flood 45°  
**WF** Wide Flood 60°  
For 7° use STB16-BK snoot with NS

**24K** 2400K Very Warm White  
**27K** 2700K Incandescent White  
**30K** 3000K Warm White  
**30D** 3000K Warm Dim\*  
**35K** 3500K Neutral White  
\*Not available in NS

**BK** Black  
**WH** White

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

# VANISHING POINT TUBO SMALL LED 24VDC TRACK HEAD

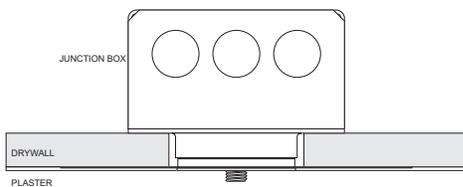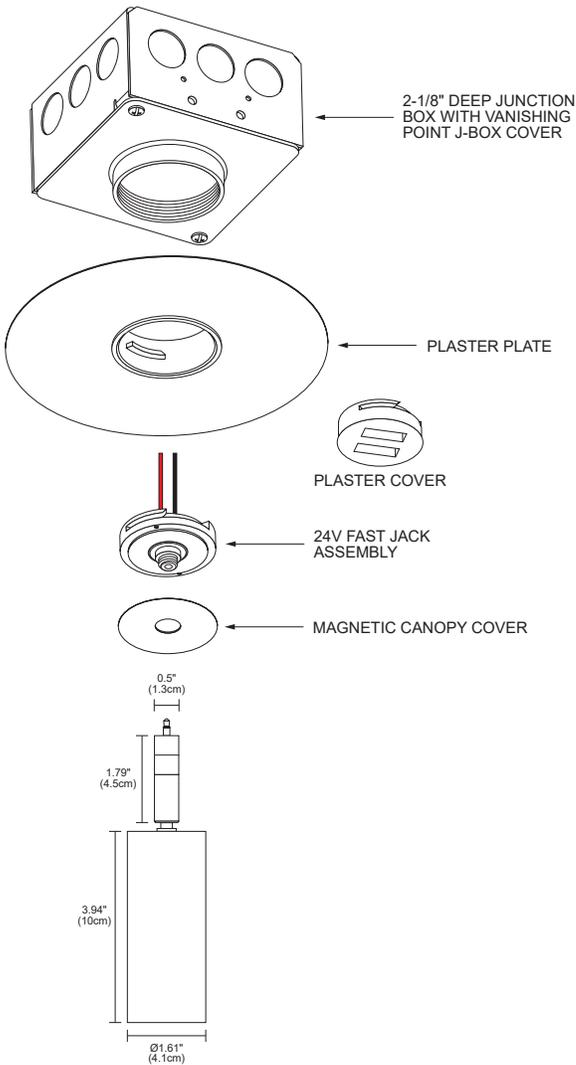

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# VANISHING POINT TUBO SMALL

## LED 24VDC TRACK HEAD


### TUBO SMALL Photometric Data

REV 07.03.24

**D** - Distance from fixture  
**FC** - Initial foot candles at the center of beam  
**DIA** - Diameter

NARROW SPOT BEAM ANGLE 15°


D'	FC	DIA.
1'	3890	3.2"
2'	972	6.4"
3'	432	9.7"
4'	243	12.9"
5'	156	16.2"
6'	108	19.4"
7'	79	22.6"
8'	61	25.9"



DIA.

SPOT BEAM ANGLE 25°


D'	FC	DIA.
1'	2080	5.4"
2'	520	10.8"
3'	231	16.2"
4'	130	21.6"
5'	83	27"
6'	57.8	32.4"
7'	42.4	37.8"
8'	32.5	43.2"



DIA.

NARROW FLOOD BEAM ANGLE 35°


D'	FC	DIA.
1'	1540	7.5"
2'	385	15.1"
3'	171	22.6"
4'	96.3	30"
5'	61.6	37.2"
6'	42.8	45.3"
7'	31.4	53"
8'	24.1	62.5"



DIA.

FLOOD BEAM ANGLE 45°


D'	FC	DIA.
1'	496	9.7"
2'	124	19.4"
3'	55.1	29.1"
4'	31	38.8"
5'	19.8	48.6"
6'	13.8	58.3"
7'	10.1	68.0"
8'	7.75	77.7"



DIA.

WIDE FLOOD BEAM ANGLE 60°

D'	FC	DIA.
1'	265	16.2"
2'	66.3	32.4"
3'	29.4	48"
4'	16.6	64.8"
5'	10.6	81"
6'	7.3	97.2"
7'	5.4	113.4"
8'	4.1	129.6"



DIA.

	TUBO SMALL LENS	SNOOT	LOUVER	FOCUS LENS	LINEAR SPREAD FILM
<b>ORDERING CODE</b>	<b>STATIC WHITE</b> LEN-TUBS-NS-SW LEN-TUBS-SP-SW LEN-TUBS-NF-SW LEN-TUBS-FL-SW LEN-TUBS-WF-SW	<b>WARM DIM</b> LEN-TUBS-SP-WD LEN-TUBS-NF-WD LEN-TUBS-FL-WD LEN-TUBS-WF-WD	L011-H	<b>LF-TUBS-SF (SOFT FOCUS),</b> <b>MF (MEDIUM FOCUS),</b> <b>WF (WHITE FOCUS)</b>	<b>LF-TUBS-LS</b>
<b>LENS SIZE</b>	1.37" (35mm) Diameter				
<b>BEAM SPREADS</b>	<b>NS (15°), SP (25°), NF (35°),</b> <b>FL (45°), WF (60°)</b>		Conical snoot creates a 7° Beam spread and is designed to reduce spill and control glare. Spun aluminum.	Hexcell louver eliminates glare. 0.125" Thickness.	Soft focus lens is included with every track head. Diffuses the beam, providing uniform illumination.
					Linear spread film: directs the light into an elongated beam. Typical applications using 10°, 15°, 25° include illuminating landscape oriented art. 35°, 40°, 60° create an elongated oval typically used for wall washing.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS



### DESCRIPTION

The Uni TRIM Power Supply is designed for 24 Volt Track Heads, accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 96 watts. Can be used as a dimmable or non-dim Power Supply. Dims down 7% with an ELV dimmer or a 0-10 volt dimmer when two additional wires are connected to the dimmer. The enclosure provides a space inside for electrical connections. Power Supply features short circuit and overload and over temperature protection. Indoor applications only. For custom quotes and layout assistance, send your drawings and ideas to our design team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

### MOUNTING

Surface mounted with conduit access

### COMPATIBILITY

Compatible with PureEdge 24VDC Track heads (T24, T24M), Vanishing Point and Mono-point/Multi-point heads (FJ24, VR, V2MR, MR2R, M44R, 2RRE, 3R8R).

### POWER INPUT

120-277 volts AC, 50/60Hz

### POWER OUTPUT

Class 2; 24 volts DC 4A, 96 watts maximum

### EFFICIENCY

85%

### AMBIENT OPERATING TEMPERATURE

-25C to 40C

### ELV DIMMER TYPE

Legrand: Adorne ADTP703TU  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio RA 2

### MAKE IT SMART

ELV & TRIAC [Smart Dimmer & Switch](#)

### 0-10 DIMMER TYPE

Lutron: Radio RA2 (with GRX-TVI), Grafik Eye Qs (with GRX-TVI), Diva (with PP20); Nova T  
Philips: Sunrise SR1200ZTUNV  
Leviton: IP710-DL

### DIMMING CURVE

Linear, Logarithmic 100% - 7% (HydraDrive)

### APPLICATIONS: Indoor

To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Product	Wattage	Dimming	Voltage	Type	Options
<b>PSB</b>	<b>96W</b>	<b>UNI</b>	<b>24VDC</b>	<b>T</b>	<b>STANDARD</b> (Leave Blank)
<b>PSB</b> Power Supply with Enclosure Box	<b>40W</b> 40 Watt <b>60W</b> 60 Watt <b>96W</b> 96 Watt <b>2X40W</b> 2x40 Watt <b>2X60W</b> 2x60 Watt <b>2X96W</b> 2x96 Watt	<b>UNI</b> Universal Power Supply	<b>24VDC</b> 24 Volt DC	<b>T</b> Trim	<b>TB</b> T-Bar <b>CP</b> Chicago Plenum

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS

## UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

	PSB-40W-UNI-24VDC-T	PSB-60W-UNI-24VDC-T	PSB-96W-UNI-24VDC-T
ORDERING CODE			
<b>SPECIFICATIONS</b>			
MAXIMUM LOAD	40W	60W	96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	15.65" X 6.37" X 3.43"	15.65" X 6.37" X 3.43"	15.65" X 6.37" X 3.43"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-40W-UNI-24VDC-T-TB	PSB-60W-UNI-24VDC-T-TB	PSB-96W-UNI-24VDC-T-TB
T-BAR CHICAGO PLENUM	PSB-40W-UNI-24VDC-T-CP	PSB-60W-UNI-24VDC-T-CP	PSB-96W-UNI-24VDC-T-CP

## UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

	PSB-2X40W-UNI-24VDC-T	PSB-2X60W-UNI-24VDC-T	PSB-2X96W-UNI-24VDC-T
ORDERING CODE			
<b>SPECIFICATIONS</b>			
MAXIMUM LOAD	2X40W	2X60W	2X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	15.4" X 9.73" X 3.43"	15.4" X 9.73" X 3.43"	15.4" X 9.73" X 3.43"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-2X40W-UNI-24VDC-T-TB	PSB-2X60W-UNI-24VDC-T-TB	PSB-2X96W-UNI-24VDC-T-TB
T-BAR CHICAGO PLENUM	PSB-2X40W-UNI-24VDC-T-CP	PSB-2X60W-UNI-24VDC-T-CP	PSB-2X96W-UNI-24VDC-T-CP

### ELV DIMMING & CONTROLS

LUTRON DIVA: DVELV-300P	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•
LUTRON RADIO RA3: RR-PROC3-XX	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•

### 0-10 DIMMING & CONTROLS

PHILIPS SUNRISE: SR1200ZTUNV	•	•	•
LUTRON DIVA: DVTV-WH, DVSTV-WH	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•
LUTRON RADIO RA3: RR-PROC3-XX	•	•	•
LEVITON: LEV40050	•	•	•
LEVITON IP710-LFZ	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•
LEGRAND RADIANT: RH703PTUW	•	•	•

### TRIAC DIMMING & CONTROLS

LUTRON SKYLARK: S2-L-WH	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•
PURE SMART DIMMER AND SWITCH	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per e and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90



- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
  - Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
  - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supplies used for LED lighting
  - 0-10 Dimmer : Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with ELV Low Voltage Drivers.

\*Title 24 with JA8 listed PureEdge products and systems


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

**POWER SUPPLY DIMENSIONS & DIAGRAMS**



**40W, 60W, 96W**

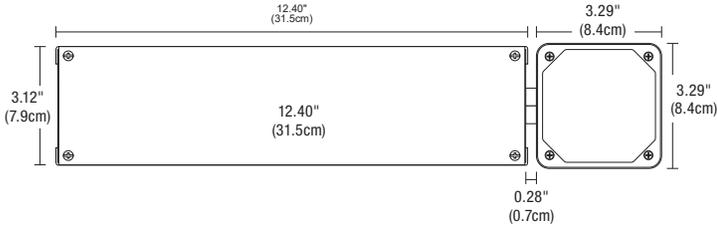

**2X40W, 2X60W, 2X96W**

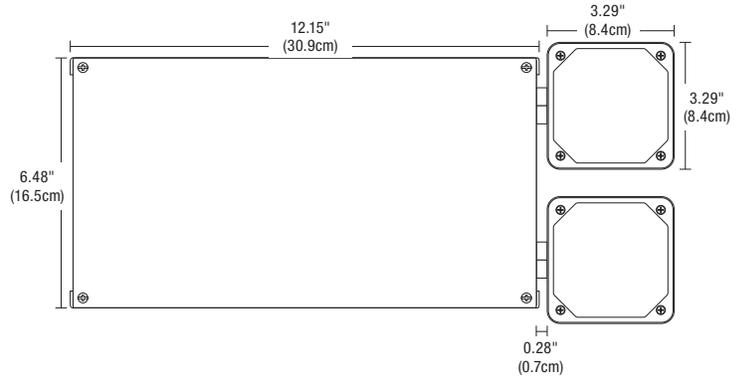

**T-BAR GRID CEILING**

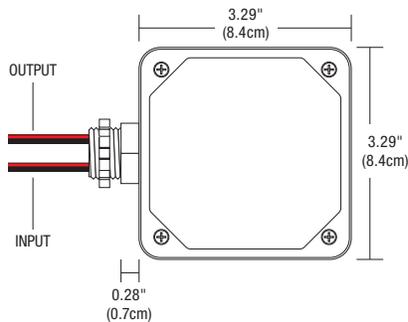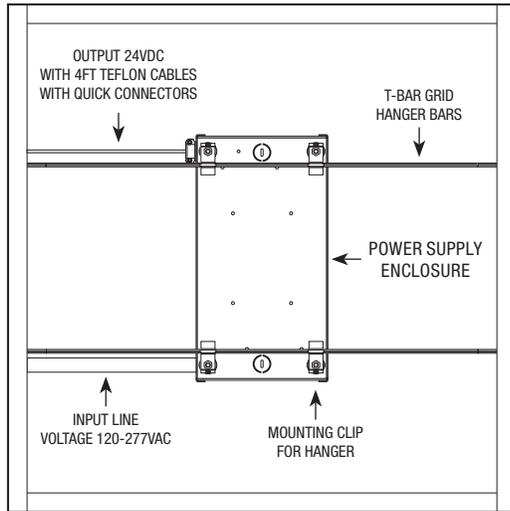

**VOLTAGE TRIM BOX**

Voltage Trim Box is included with power supply. Mounts in 1/2" knock-outs. The part number below is to be used for replacement only.

Product	Voltage	Type
<b>PSB</b>	<b>24VDC</b>	<b>TRIM</b>
PSB Power Supply with Enclosure Box	24VDC 24 Volt DC	TRIM Voltage Trim Box


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM


24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS

REV 07.03.24


## ELV WIRING DIAGRAM

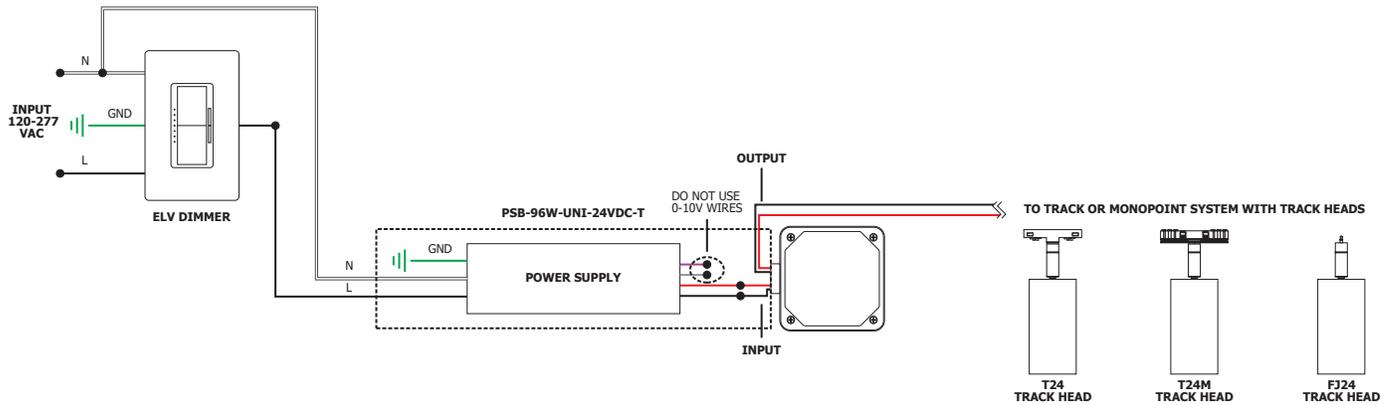

## 0-10V WIRING DIAGRAM

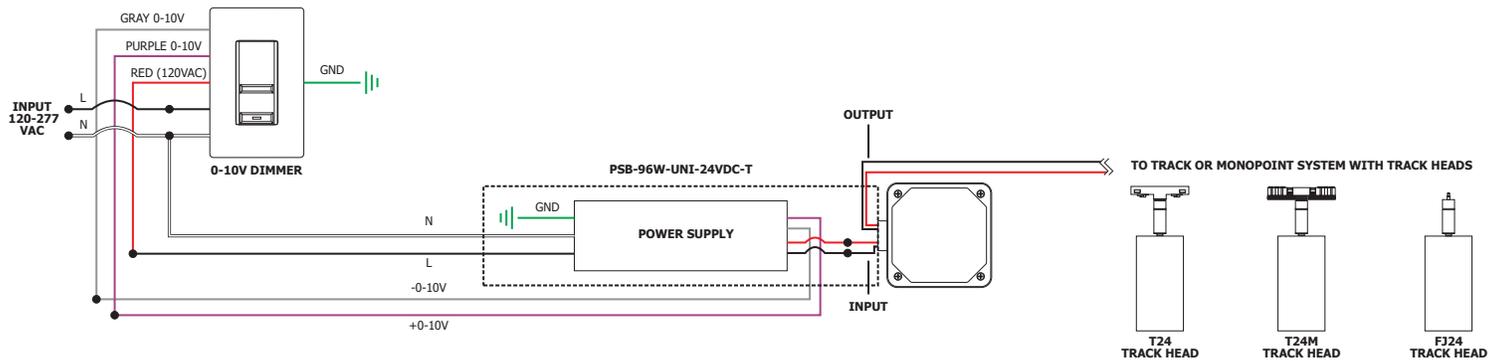

## SMART WIRING DIAGRAM & NETWORK TOPOGRAPHY

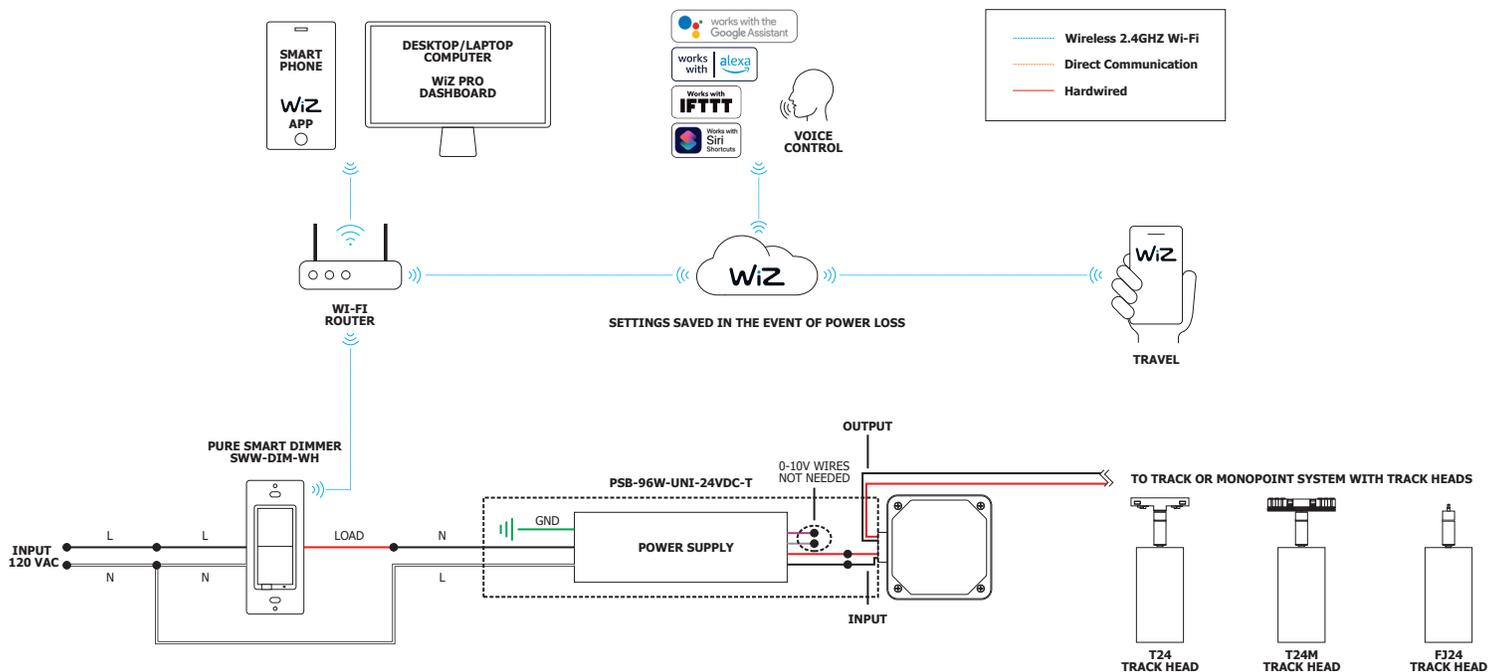


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# CEILING TM30 DATA

## LED 24VDC TRACK HEAD

**TM-30-15 DATA:** The data below is for Tubo. Consistent color temperatures among multiple track heads is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


**2400K** | Rf: 91.2 | Rg: 96.8  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%


**2700K** | Rf: 87.7 | Rg: 96.1  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%


**3000K** | Rf: 88.1 | Rg: 99.7  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%


**3500K** | Rf: 86.1 | Rg: 95.5  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

**3000D** | Rf: 89.8 | Rg: 101.4  
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--