



VANISHING POINT 12VAC MONOPOINT

FAST JACK CEILING CONNECTION SYSTEM




DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 08.03.26



VR-FJ12-WH
Vanishing Point .5" Opening Plaster-In, Remote Power supply (Order separately)

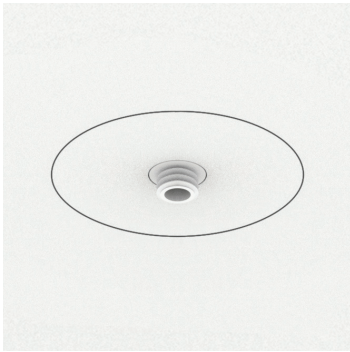

V2P-FJ12-WH
Vanishing Point 2" Flush Canopy to dry wall, with ELV power supply in J-Box



V2MP-FJ12-BZ
Vanishing Point 2" Flush Canopy for Millwork Ceiling, with ELV power supply in J-Box

DESCRIPTION

The Vanishing Point 12VAC Fast Jack Connection System comes in four distinct mounting options. Drywall and Millwork applications. 12V Fast Jack Lighting Fixtures, Controls, and Remote Power Supplies Sold Separately.

MOUNTING OPTIONS

VR - NO visible canopy you only see the 0.5" fixture stem Vanish Into the Ceiling, can feed power up to 6 fixtures with a 60 Watt Class 2 (Remote Power Supply within 15ft), or up to 30 fixtures using a 300 Watt (Remote Power Supply not included, see page 8 for ordering information).

V2P - Included ELV Power Supply fits within included J-Box. Slight outline of the 2.0" round canopy will be visible. With Power.

MILL-WORK FLUSH-MOUNT CANOPY SYSTEM OPTIONS

V2MR - Millwork flush mount 2.0" Round Canopy sits flush with a Millwork ceiling for a clean look. Can feed up to 30 fixtures with Remote Power Supply not included. See page 8 for ordering information.

V2MP- Millwork flush mount 2.0" Canopy with ELV Power Supply included within J-Box. Round Canopy sits flush with a Millwork ceiling for a clean look. With Power.

CONNECTION TYPES

FJ12 - Fast Jack 12VAC Connection

WARRANTY / LABELS


Prorated 5 year warranty. Assembled in America
ETL (Conforms to UL1598 and CSA 22.2 #250.0)

System	Type/Voltage	Finish
VR	FJ12	WH
VR* Vanishing Point 0.5" Connection Drywall, No Outline of Canopy at connection point. Remote Power Supply	FJ12 Fast Jack 12VAC Connection	WH White
V2P* Vanishing Point 2.0" Connection Drywall flush mount canopy outline will show. ELV power supply included with J-Box		BK Black
V2MR Vanishing Point 2.0" Millwork Flush-Mount Canopy, Remote Power Supply.		SN Satin Nickel
V2MP Vanishing Point 2.0" Flush-Mount Canopy, ELV 60W Power Supply fits in J-box, for use with Mill-Work		BZ Bronze
*White Finish Only		

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------




To Remote Power Supply (not included, see page 8)

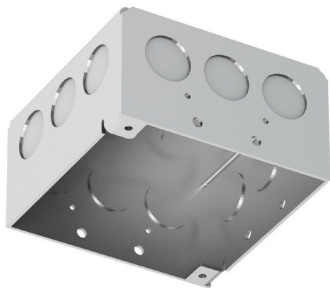

TE-60L-12 Power Supply fits in J-Box



To Remote Power Supply (not included, see page 8)

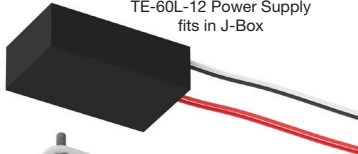

VR-FJ

Vanishing Point Flush to dry wall, plaster in and paint, with Remote Power

V2P-FJ

Vanishing Point 2" Flush Canopy to dry wall, plaster in and paint, with ELV power supply in J-Box

V2MR-FJ

Vanishing Point 2" Flush Canopy for Millwork with Remote Power

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



PISTON

FJ12 VANISHING POINT CONNECTOR


DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING



REV 08.03.26



FJ-PST-SP-1-30K-SN
Satin Nickel

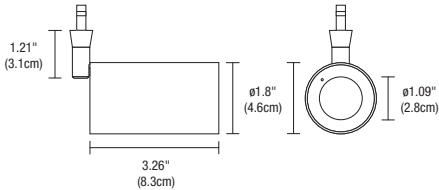

System	Fixture	Head / Beam Spread Lens	Stem Height	Color Temperature	Finish
FJ	PST	SP	1	30K	SN
FJ Fast Jack (Connector only)	PST Piston	SP Spot 15° NF Narrow Flood 25° FL Flood 35° WF Wide Flood 45°	1 1" (2.5cm)	30K 3000K Warm White	SN Satin Nickel



REBEL

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING




REV 08.03.26



FJ-REB-1-SN
Satin Nickel



FJ-REB-1-BZ
Antique Bronze


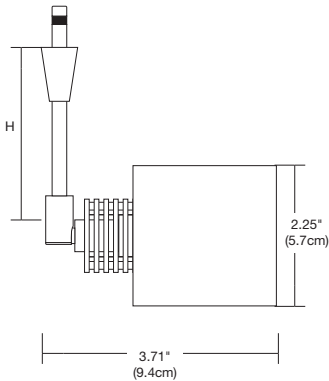


System	Fixture	Stem Height	Finish
FJ	REB	1	SN
FJ Fast Jack	REB Rebel	1 1.2" (2.5cm) 6 6" (15.2cm)	BZ Antique Bronze SN Satin Nickel

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT 12VAC MONOPOINT

FAST JACK CEILING CONNECTION SYSTEM

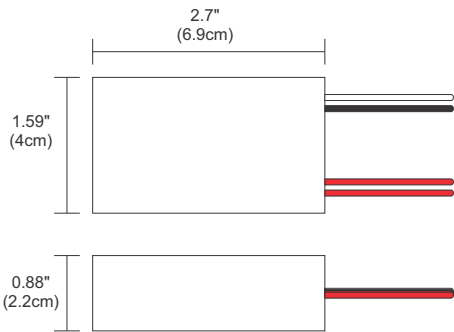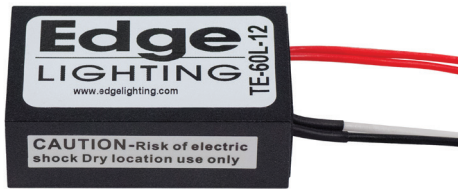


REMOTE 60W 12VAC CLASS 2 POWER SUPPLY

TE-60L-12 60 Watt 12VAC Electronic Transformer converts 120 volt line voltage to 12 volts and features built-in short-circuit protection. The solid, lightweight remote power supply fits inside a standard electrical junction box behind a power feed canopy. Must be in an accessible location or inside an electrical box. Must be within 10' of lamp, max six 9 watt fixtures.

- No load technology, works with LED AC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meets UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable with ELV dimmer

System	Power	Voltage Output
TE	60L	12
TE Transformer Electronic	60L 60 Watts	12 12 Volt AC

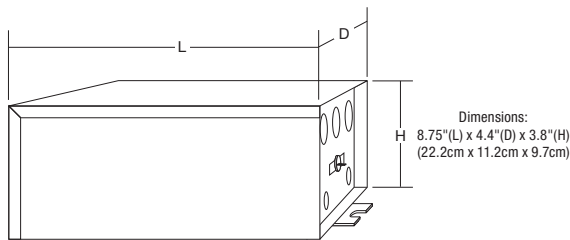

REMOTE MAGNETIC TRANSFORMER UL2108 150W AND 300W 12VAC POWER SUPPLY (SOLD SEPARATELY)

The 150 watt or 300 watt 12 Volt Remote Magnetic Transformer converts 120VAC line voltage into 12VAC low voltage power and are protected by fast-acting circuit breakers. The low voltage output powers the Vanishing Point System up to 300 watts using LED MR16 12V lamps, 8 watts max per connection. Power up to 30 Vanishing Point fixtures using a single power supply at 300 Watts and 8 Watts per Lamp. Dimmable with Magnetic Low Voltage Dimmer sold separately.

System	Power	Voltage Output
T	300	12
T Transformer Magnetic	150 150 Watt Magnetic Remote Transformer 300 300 Watt Magnetic Remote Transformer	12 12 Volt AC

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--