


AETHER 2" - Square Adjustable Trimless

R2ASAL

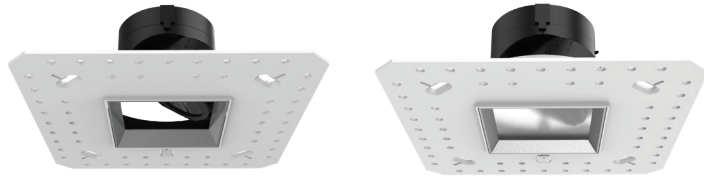

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- Designed to fit in tight plenum
- 2" trim aperture, 2" housing height
- Damp Location Trims: 0-30° vertical and 365° horizontal adjustment
- Wet Location Trims: 0-25° vertical and 365° horizontal adjustment
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim with die-cast aluminum heat sink
Dimming:	100% - 5% with 0-10V 100% - 5% with Electronic Low Voltage (ELV)/ TRIAC
Input:	120V-277V AC
Power	15W, power factor 0.9
Mounting:	Retention clips firmly hold trim to housing
Finish:	Powder Coated White, Black, Enamel Coated Haze
Ceiling thickness:	½" - 1"
Standards:	UL & cUL Damp Listed, UL & cUL Wet Listed (Lensed options only), Title 24 JA8 Compliant

Trim (See next page for housing)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	R2ASAL Square, 0-30° Adjustable Damp Location	S 15°	827 2700K 85 835 8045	85	885 8535	8045	BK Black HZ Haze WT White
			830 3000K 85 885 8535				
			835 3500K 85 905 8740				
			840 4000K 85 915 8810				
			927 2700K 90 690 6625				
		930 3000K 90 720 6935					
		N 26°	827 2700K 85 1275 4270	85	1355 4530	4640	BK Black HZ Haze WT White
			830 3000K 85 1385 4640				
			835 3500K 85 1385 4640				
	840 4000K 85 1395 4675						
	F 40°	927 2700K 90 1050 3535	90	1095 3685	2095	BK Black HZ Haze WT White	
		930 3000K 90 1095 3685					
		827 2700K 85 1280 2530					
		830 3000K 85 1355 2685					
		835 3500K 85 1390 2750					
840 4000K 85 1400 2770							
R2ASAL Square, 0-25° Adjustable Lensed, Wet Location	S 16°	827 2700K 85 765 6215	85	810 6590	6750	LBK Lensed Black LHZ Lensed Haze LWT Lensed White	
		830 3000K 85 810 6590					
		835 3500K 85 830 6750					
		840 4000K 85 840 6805					
		927 2700K 90 630 5115					
		930 3000K 90 660 5355					
	N 28°	827 2700K 85 1180 3680	85	1250 3905	4000	LBK Lensed Black LHZ Lensed Haze LWT Lensed White	
		830 3000K 85 1280 4000					
		835 3500K 85 1280 4000					
		840 4000K 85 1290 4030					
	F 40°	927 2700K 90 970 3045	90	1015 3175	1855	LBK Lensed Black LHZ Lensed Haze LWT Lensed White	
		930 3000K 90 1015 3175					
827 2700K 85 1175 2245							
830 3000K 85 1245 2380							
835 3500K 85 1275 2435							
840 4000K 85 1285 2455							

R2ASAL- _____ - _____

Example: **R2ASAL-N930-WT**

Please see next page for housing (required)


wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

AETHER 2" - Square Adjustable Trimless Housing



Housing

Model

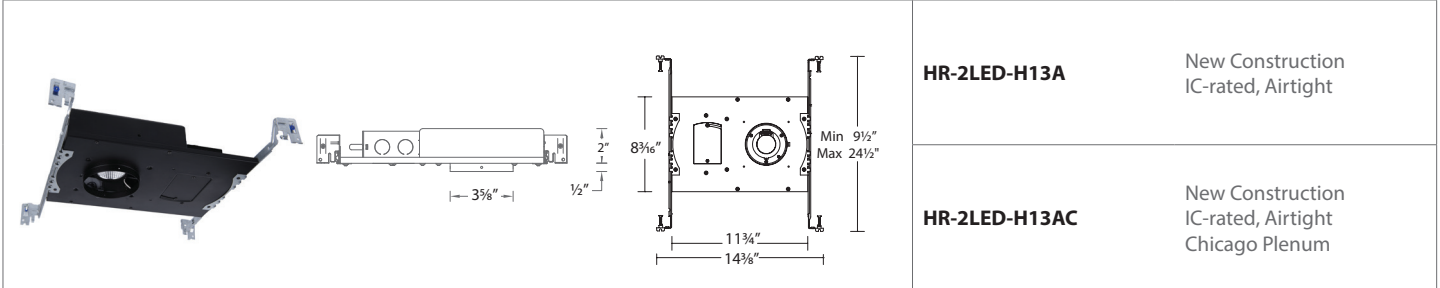

HR-2LED-H13A

New Construction
IC-rated, Airtight

HR-2LED-H13AC

New Construction
IC-rated, Airtight
Chicago Plenum

HR-2LED-H13

Example: **HR-2LED-H13A**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761