

WAC LIGHTING

Step Light with Photocell

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Voltage	Color Temp & CRI	Lumens	Finish
WL-LED202 120 VAC	3000K 90 Amber	65 65	BK Black on Aluminum BN Brush Nickel on Aluminum BZ Bronze on Aluminum SS Stainless Steel WT White on Aluminum

Example: **WL-LED202-30-BK**

FEATURES


- Options in die-cast brass or 316 marine-grade stainless steel
- Fits into 2"x4" J-Box with minimum inside dimensions of 3"x2"x2"
- No driver needed
- No heat radiation
- Low profile, flush to wall aesthetics with no visible hardware
- Balanced lighting, free of shadows with minimum glare
- Integrated photocell for energy saving
- Driver concealed within the fixture
- 5 Year warranty



SPECIFICATIONS

Construction:	Corrosion resistant aluminum alloy, Stainless Steel
Power:	2W
Input:	120 VAC, 50/60Hz
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Lens:	Tempered Glass
Rated Life:	54000 Hours
Finish:	Enamel Coated:Black on Aluminum, Enamel Coated::Brush Nickel on Aluminum, Enamel Coated:::Bronze on Aluminum, Enamel Coated:::Stainless Steel, Enamel Coated::::White on Aluminum
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP66, ADA

FINISHES:

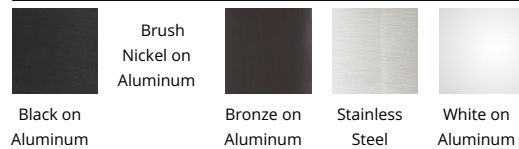

LINE DRAWING:

