



REV01.20.17



Top View

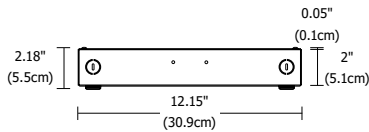

Side View

Description:

Accepts input voltage of 120VAC and outputs 24VDC power up to 2x60 watts. Can be used as a dimmable or non-dim Power Supply. Power Supply features short circuit and overload protection. Indoor applications only.

Applications: Indoor*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input:

120VAC, 50/60Hz

Power Output:

Class 2; 24 volts DC 2 x 2.5A, 2x60 watts maximum

Dimensions:

12.15" x 6.48" x 2.18"

Dimmer Type:


Legrand: Adorne ADTP703TU

Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio RA 2

Product	Wattage	Dimming	Voltage
PSB	2X60W	ELV	24VDC
PSB Power Supply with Enclosure Box	2X60W 2x60 Watt	ELV Electronic Low Voltage Dimming	24VDC 24 Volt DC

2X60W, 24VDC LOW VOLTAGE WIRE SIZE CHART: 3% VOLTAGE DROP

WIRE LENGTH (FT)	UP TO 53FT	54FT-82FT	83FT-137FT
WIRE SIZE	14 AWG	12 AWG	10 AWG

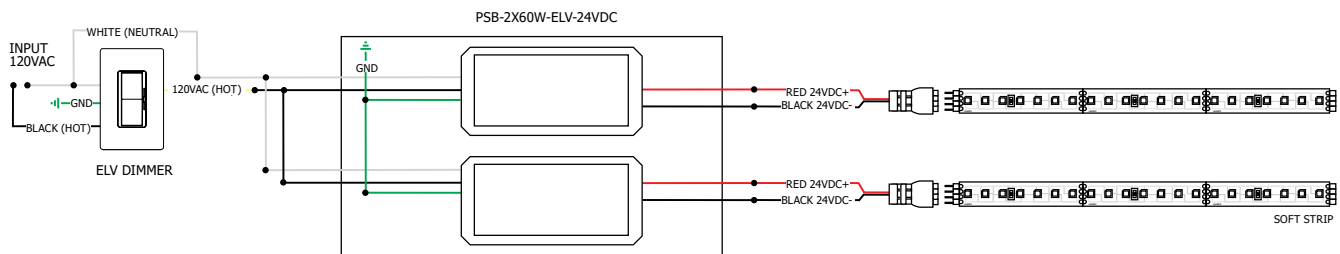

PROJECT:

FIXTURE TYPE:

DATE:

