
ELECTRONIC





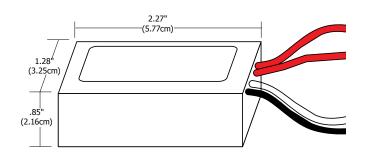

Remote Electronic LED Power Supply 60W 12V

The compact, lightweight remote electronic LED Power Supply converts standard 120 volt line voltage to 12 volts and features built-in short-circuit protection. In the event of a short or overload, reset transformer at wall switch once short or overload is corrected. The single-feed transformer is both 12 volt AC LED and halogen compatible; it fits inside a 4" electrical box behind a power feed canopy.

Dimming:


300 watt low voltage electronic dimmer For LED dimming information, visit www.edgelighting.com

Mounting Requirements:

Must be in accessible location or inside an electrical box

Weight:

.8 lb (.36 kg)



Compatible Power Feed Canopies				
	MP — MP Monorail Power Feed	4RD – 4" Round Canopy	1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP – MP Monorail Power Feed	4RD – 4" Round Canopy	A 12' (3.7m) Adjustable Cable	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP — MP Monorail Power Feed	4RD 4" Round Canopy	FE Feed End	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP — MP Monorail Power Feed	4RD -	ME Adjustable Male End	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP — MP Monorail Power Feed	2SQ – 2" Square Canopy J-Box Included	1 1" (2.5cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP — MP Monorail Power Feed	2SQ – 2" Square Canopy J-Box Included	FE Feed End	SN Satin Nickel PN Polished Nickel BZ Antique Bronze

EDGE

PROJECT:

FIXTURE TYPE:

F: 773.935.5613

DATE