

Fues Pendants**SLPD10327, SLPD10427 | 1.0****VISUAL COMFORT & CO.****MODERN COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

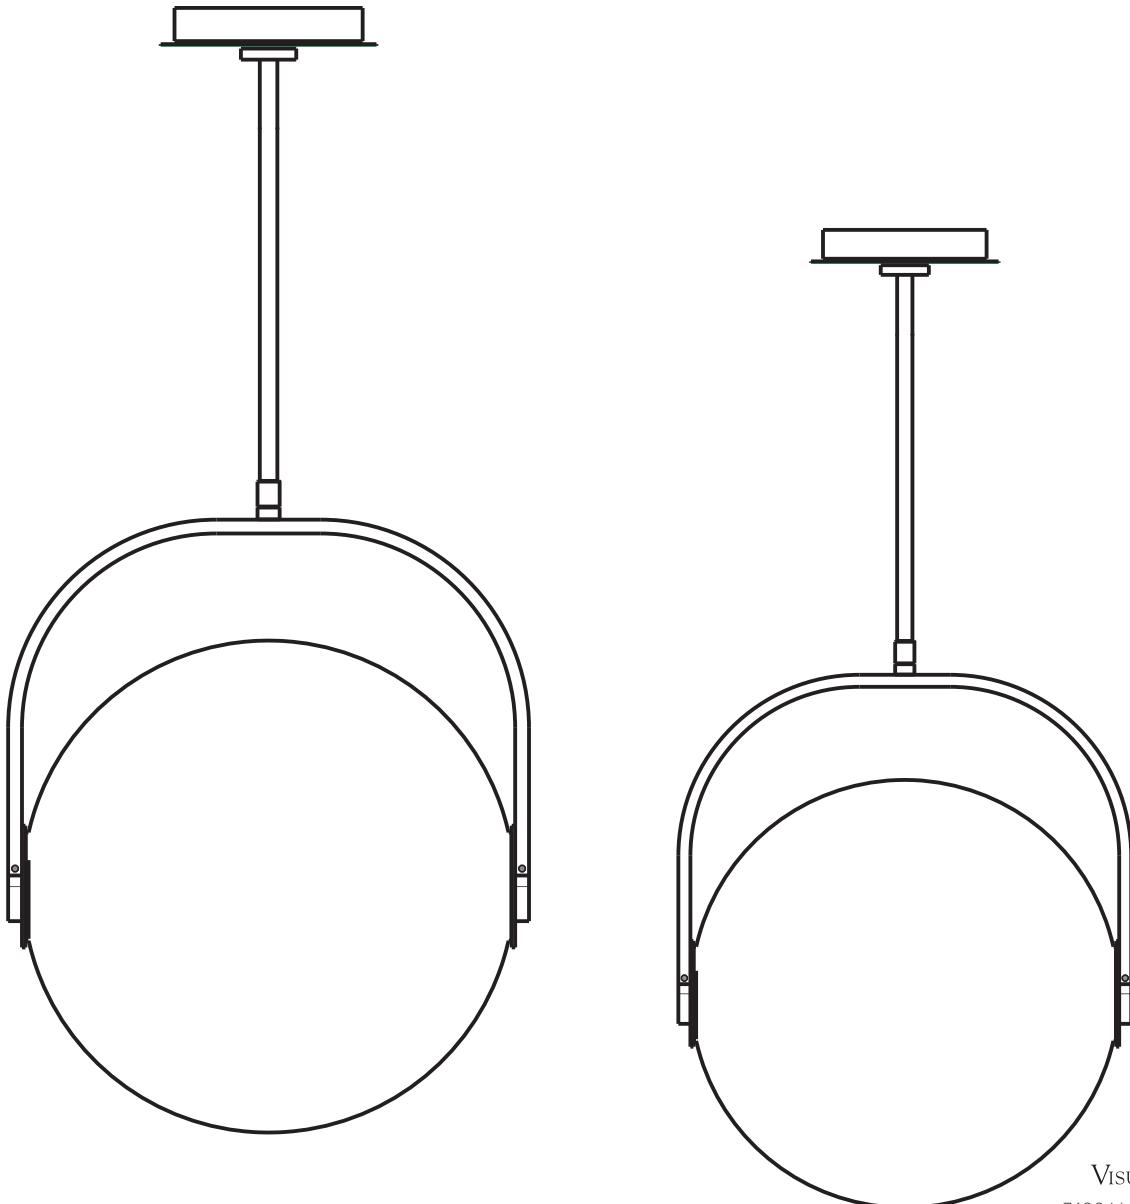SAVE THESE INSTRUCTIONS!


VISUAL COMFORT & CO.

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500


www.visualcomfort.com

Install the Fixture

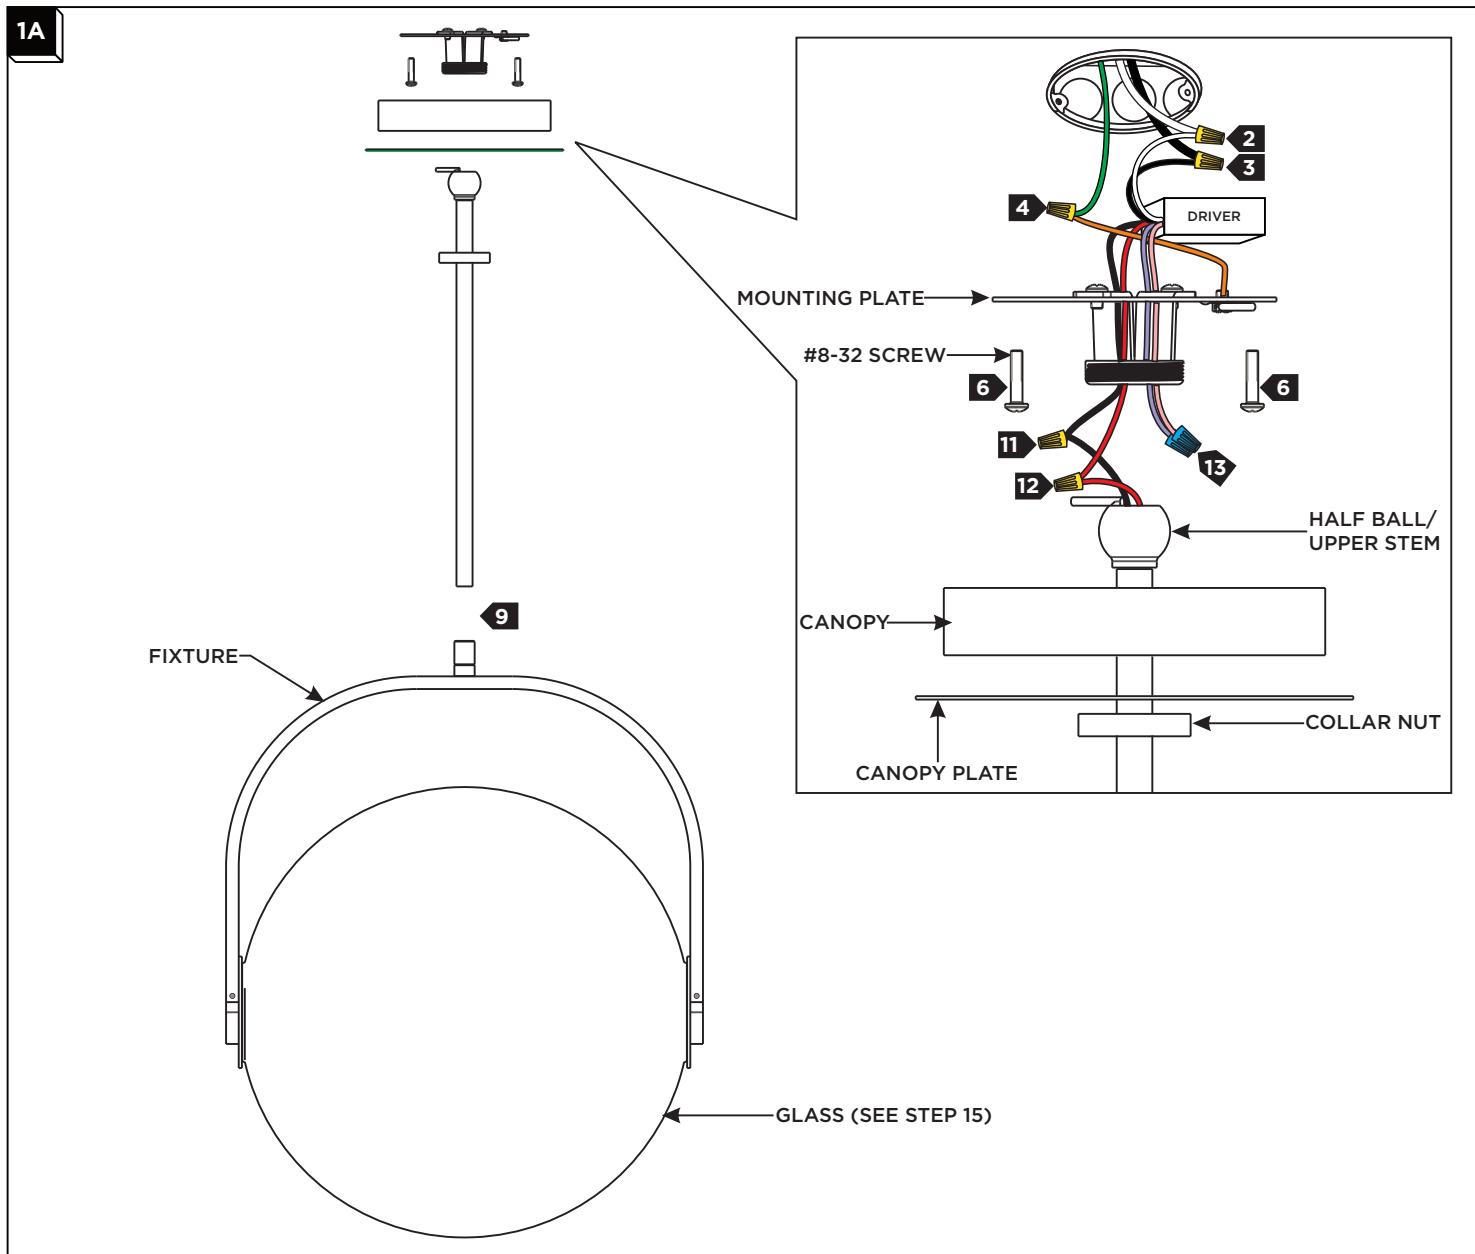


- 1 Remove the mounting plate and driver from the canopy.
- 2 Connect the white input driver wire to the neutral power line wire with a wire nut.
- 3 Connect the black input driver wire to the hot power line wire with a wire nut.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Place the driver and wire connections inside the junction box.
- 6 Secure the mounting plate to ceiling with the #8-32 screws provided making sure to leave the driver output wires and dimming wires (if applicable) available.
- 7 Determine the desired height of the fixture using the provided stems and half ball/upper stem and assemble them by screwing them together.
- 8 From the end of the stem assembly, slide the canopy, plate, and collar nut (in that order) onto the half ball/stem assembly.
- 9 Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture.
- 10 Seat the half ball into the mounting plate ensuring no wires are being pinched.
- 11 Connect the negative (-) fixture wire to the negative (-) output driver wire with a wire nut.
- 12 Connect the positive (+) fixture wire to the positive (+) output driver wire with a wire nut.
- 13 **If using 0-10V dimming**, connect the purple and gray/pink wires to a compatible dimmer. **If not using 0-10V dimming, make sure to cap off these wires.**
- 14 Neatly place the wire connections inside the canopy/junction box, then slide the plate and canopy up over the mounting plate, and secure in place with the collar nut.
- 15 Please refer to the next page for glass removal and/or replacement.

Remove the Glass (for Replacement or Cleaning)

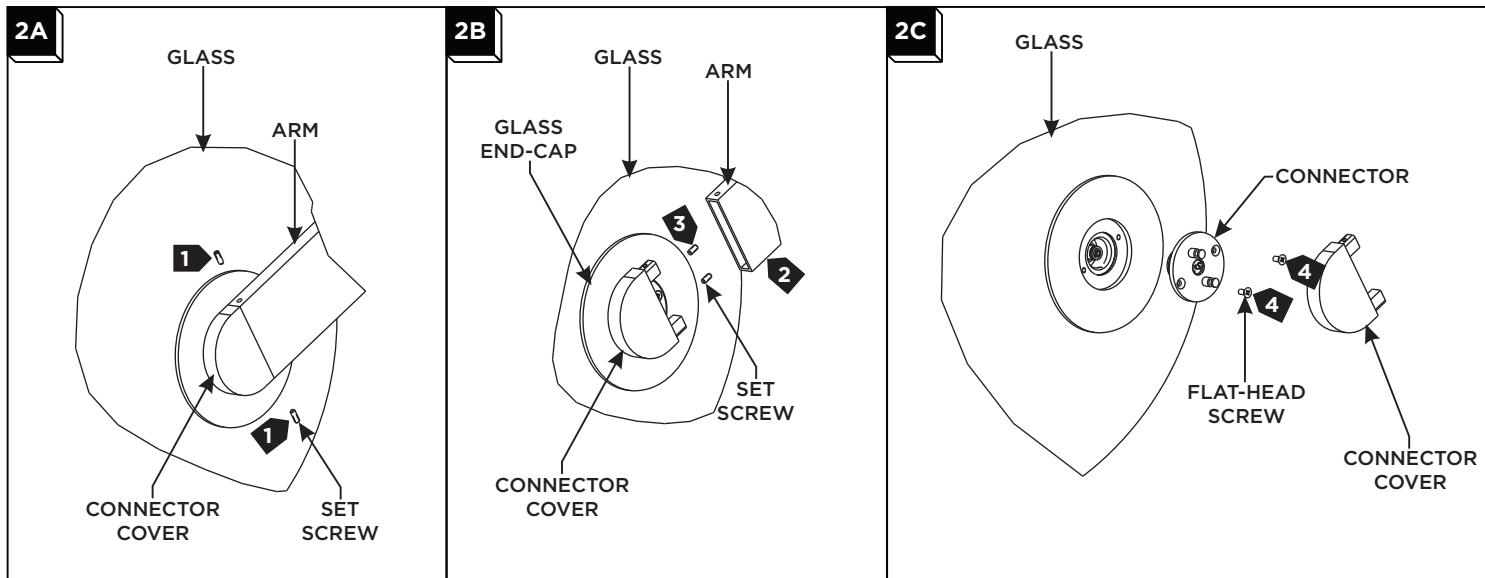

- 1 Remove 2 set screws from each side of the arm.
- 2 Wiggle the band and arm off of the end-cap assembly. Carefully, pull the band and arm out just enough to continue disassembly.
- 3 Loosen and remove 2 set screws from each side holding end-cap cover. Remove and set aside cover.
- 4 Remove 2 flat-head screws from each side, and remove electrical connector that is inserted at each end of the glass. Set aside the band and arm assembly.

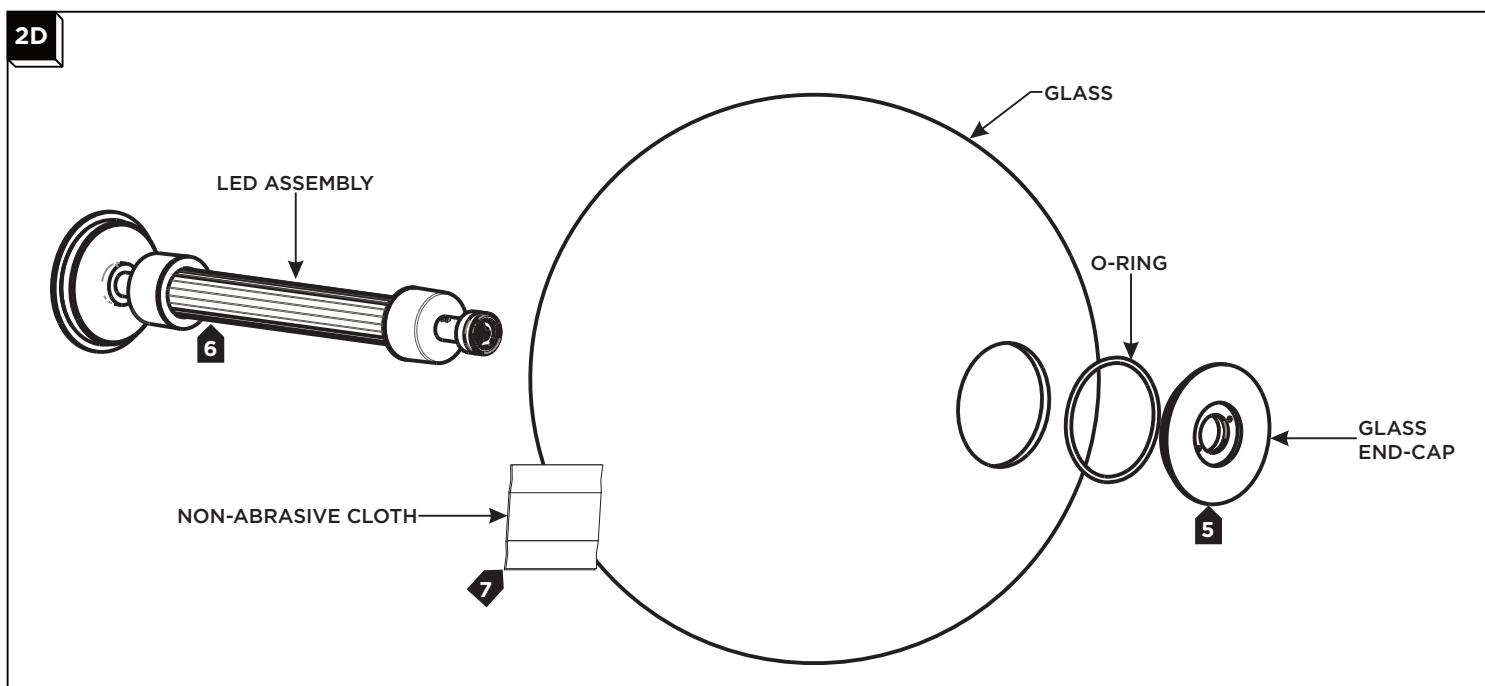

- 5 While holding the glass and LED assembly steady, unscrew one end of end-cap slowly and carefully with the o-ring attached.
- 6 Pull the rest of the LED assembly out from the other end of glass and set aside.
- 7 Clean the glass with a non-abrasive cloth and replace the glass and LED assembly by reversing this procedure.

