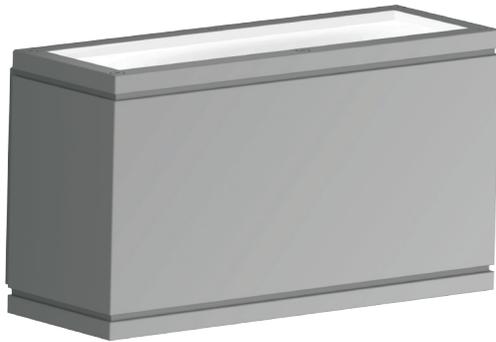


# RUBIX - model: WS-W2509, WS-W2510

LED Wall Mount

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT DESCRIPTION

Available in single- and twin-light configurations, this die cast aluminum LED wall luminaire is wet location listed for a broad range of exterior lighting applications. Designed with an oblong profile, this version of Rubix mounts upwards or downwards.

## FEATURES

- Energy Star® rated
- CEC Title 24 Compliant
- Mounts Up or Down
- IP65 Rated, ETL & cETL Wet Location Listed
- Die-Cast Aluminum Construction
- Universal Voltage Input (120V - 277V)
- Dimming: ELV (120V) or 0-10V
- ADA Compliant

## SPECIFICATIONS

**Construction:** Aluminum with etched glass.

**Power:** Integral driver in luminaire. 120V - 277V input.

**Light Source:** High output LED

**Mounting:** Mounts directly to junction box

**Dimming:** 0-10V Dimming: 100%-10%

ELV Dimming: 100%-15% (120V only)






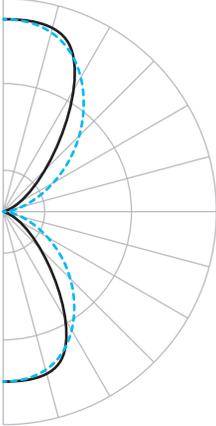
**Finish:** Brushed Aluminum (AL), Black (BK), Bronze (BZ), Graphite (GH), White (WT)

**Color Temp:** 3000K

**CRI:** 90

**Rated Life:** 70,000 hours

**Standards:** Energy Star® rated, IP65 Rated, ETL & cETL Wet Location Listed, CEC Title 24 Compliant, Dark Sky Friendly, ADA Compliant

	Beam	Photometry	Voltage	Watt	Lumens	Finish
 <p>Single Light</p>  <p><b>WS-W2509</b> Dark Sky Friendly 86° Energy Star®</p>			120V - 277V	16W	805	<b>AL</b> Brushed Aluminum <b>BK</b> Black <b>BZ</b> Bronze <b>GH</b> Graphite <b>WT</b> White 
 <p>Double Light</p>  <p><b>WS-W2510</b> 86°</p>			120V - 277V	30W	1385	

-

Example: **WS-W2510-GH**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760