

Lightology

lightology.com
866-954-4489
04-21-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **LCF1038895**
 Approved On: _____ Approved By: _____

STELLR Surface Mount By Lucifer Lighting



Description

The Stellr Ceiling Light features an organic shape and conceals the performance mechanics of this minimalist luminaire. A directional downlight is paired with a polymer waveguide which allows for directional and ambient light configurations. Offers the ability to change the feeling of the room as well as the appearance of the luminaire. Includes soft focus lens and a standard junction box mounting plate. Downlight available in a 35 degree beam angle. Both light sources dim independently. Integral LED drivers dimmable with electronic low voltage (ELV) or Triac dimmer down to 1%.STELLR features two light sources downlight (direct) and waveguide (indirect). For simultaneous control of these sources, wire normally. For independent control of these sources, two separate 120V wires are required.

Specifications


COLOR	N/A
BODY FINISH	Cashmere Gold Powdercoat
WATTAGE	31W
DIMMER	Low Voltage Electronic
DIMENSIONS	10.23"W x 5.16"H
INTEGRATED LED MODULE	2 x LED/15.5W/120V LED

Technical Information

PRODUCT DIMENSIONS	Canopy: 6.4" diameter
LAMP LIFE	50000 hours
BEAM ANGLE	35°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	127.16
LUMINOUS FLUX	1971 lumens



Shown in cashmere gold powdercoat

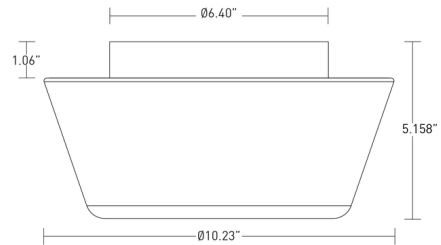

CLICK TO VIEW PRODUCT

Notes: